


## 25711 NOTUS 3WS EVG 418 NT

Ceiling louver fitting

5905339257116

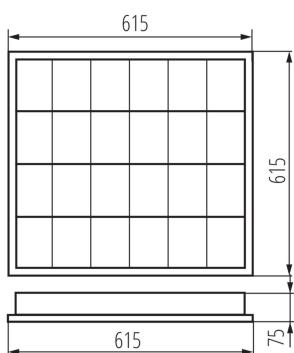

Kanlux NOTUS are raster facade luminaires that can be mounted quickly and easily. Raster lighting is still a very popular solution for office and industrial spaces. It is all due to good lighting parameters at a good price, simple construction and durability of the materials of which they are made.

### PRODUCT PARAMETERS:

**Colour:** white

**Place of assembly:** ceiling mounted

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Stabiliser/lamp start:** warm

**Light source included:** no

**Length [mm]:** 615

**Width [mm]:** 615

**Height [mm]:** 75

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 4 x 18

**Class of protection against electric shock:** I

**Light source:** T8

**Cap:** G13

**Ambient temperature range to which the product can be exposed:** 5÷25

**Enclosure material:** steel

**Reflector material:** aluminum alloy

**Connection type:** Self-clamping block

**Range of sections of wires used [mm<sup>2</sup>]:** 1÷2,5

**Stabiliser type:** EVG

**Stabiliser energy class:** A2

**IP class:** 20

### LOGISTIC DATA:

**Packaging method:** 1

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 1

**Net unit weight [g]:** 2420

**Grammage [g]:** 3030

**Length of a unit pack [cm]:** 65

**Width of a unit pack [cm]:** 62.5

**Height of a unit pack [cm]:** 8.5

**Weight of a cardboard box [kg]:** 3.03

**Width of a cardboard box [cm]:** 63

**Height of a cardboard box [cm]:** 8.8

**Length of a cardboard box [cm]:** 65.5

## 25711 NOTUS 3WS EVG 418 NT

### Ceiling louver fitting



**Volume of a cardboard box [m<sup>3</sup>]:** 0.036313


#### ADDITIONAL INFORMATION:

- half-parabolic reflector / V-shaped grille cross-bars
- fluorescent lamp sockets concealed with a reflector
- light fixtures designed for hanging on slings
- Class A2 OSRAM ballast
- easy installation of the grille on spring hooks
- quick coupling for connecting the power supply, easier and quicker installation, powder coating
- NOTUS 3WS equipped with a "warm start" ballast

KANLUX S.A. (kat 25711) NOTUS 3WS EVG 418 NT / Krzywa rozsytuowania światła (biegunowo)

Oprawa: KANLUX S.A. (kat 25711) NOTUS 3WS EVG 418 NT

Lampy: 4 x T26 18W/827

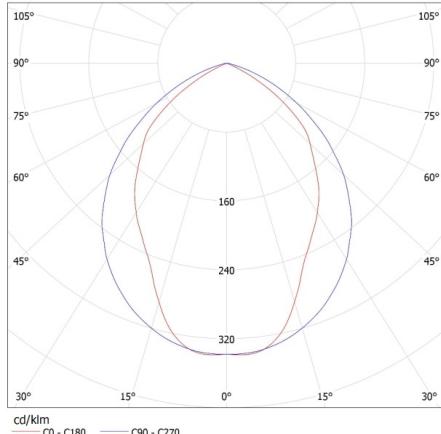

#### ACCESSORIES:

##### 07870 ROPE-NT 150

ROPE-NT 150 steel rope (double) for suspending fittings, 2 pcs. in a set



##### 07871 ROPE-NT 150 SINGLE

ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set

