
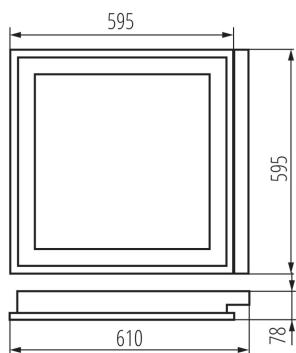


25713 REGIS 3WS OPAL 418 PT

Embedded louver fitting

5905339257130



Kanlux REGIS are raster recessed luminaires that can be mounted quickly and easily with spring clips and quick couplings. Raster lighting is still a very popular solution for office and industrial spaces.

PRODUCT PARAMETERS:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Stabiliser/lamp start: warm

The product is not suitable to be covered with a heat-insulating material: yes

Light source included: no

Length [mm]: 610

Width [mm]: 595

Height [mm]: 78

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 4 x 18

Class of protection against electric shock: I

Lampshade material: PMMA

Light source: T8

Cap: G13

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: steel

Reflector material: aluminum alloy

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1÷2,5

Stabiliser type: EVG

Stabiliser energy class: A2

IP class: 40

LOGISTIC DATA:

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 3022

Grammage [g]: 3624

Length of a unit pack [cm]: 65

Width of a unit pack [cm]: 62.5

Height of a unit pack [cm]: 8.5

Weight of a cardboard box [kg]: 3.624

Width of a cardboard box [cm]: 63

25713 REGIS 3WS OPAL 418 PT

Embedded louver fitting

Height of a cardboard box [cm]: 8.8

Length of a cardboard box [cm]: 65.5


Volume of a cardboard box [m³]: 0.036313

ADDITIONAL INFORMATION:

- reflector in the shape of a half-parabola / raster crossbars in the shape of "V" / sockets of fluorescent lamps masked with a reflector (exception: version REGIS 3 OPAL, REGIS 3WS OPAL with an opal board)
- the casing contains openings facilitating straight through type power supply
- protective cable on a raster, additionally securing against electric shock, except the version REGIS 3 OPAL, REGIS 3WS OPAL.
- simple assembly of the raster on spring catches
- quick coupling, for connection of power supply, facilitates and accelerates assembly, stabilizer by OSRAM in A2 class
- powder coating
- REGIS 3WS equipped with a stabilizer with "warm start".

KANLUX S.A. (kat 25713) REGIS 3WS OPAL 418 / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 25713) REGIS 3WS OPAL 418
Lampy: 4 x T26 18W/827

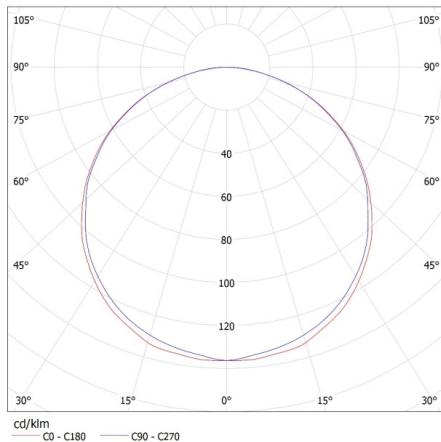

ACCESSORIES:

72333 CLP-REGIS/PT

CLP-REGIS/PT mounting support, used for building in fittings in a plasterboard suspended ceiling. 4 pcs. in a set.

