

## 26520 SANSO LED 15W-NW-SE

Ceiling-mounted LED light fitting

5905339265203



Kanlux SANSO LED ceiling luminaire with a built-in motion detector PIR allows for its customisation depending on your needs. It is also characterised by increased tightness (IP 44) so its inside is protected against dust and dirt.

### TYPE OF LIGHT SOURCE:

**Lighting technology used:** LED

**Non-directional or directional light source :** NDLS

**Mains or non-mains light source :** NMLS

**Connected light source (CLS):** no

**Colour-tunable light source:** no

**High luminance light source:** no

**Anti-glare shield:** no

**Dimmable:** no

### PRODUCT PARAMETERS:

**Colour:** white

**Place of assembly:** wall mounted, ceiling mounted

**Place of application:** Indoors and outdoors

**Minimum distance from the illuminated object :** 0,5m

**Compatible with a dimmer:** no

**Wykrywanie ruchu:** yes

**Height [mm]:** 50

**Diameter [mm]:** 250

**Integrated LED light source:** yes

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 15

**Class of protection against electric shock :** II

**Lampshade material:** PC

**Enclosure material:** PC

**Diode type:** LED SMD

**LED module:** ST71B

**Luminous flux of the light fitting [lm]:** 1250

**Colour temperature:** white


**Service life [h]:** 15000

**Number of on/off cycles:** ≥10000

**Lighting angle [°]:** 120

## 26520 SANSO LED 15W-NW-SE

Ceiling-mounted LED light fitting

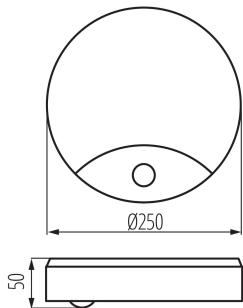

**Ambient temperature range to which the product can be exposed:** -20÷35

**Sensor type:** PIR

**Connection type:** Bolt terminal block

**Range of sections of wires used [mm<sup>2</sup>]:** 0,5-1,5

**Sensor-operation time [second-minute]:** 5-5

**sensor working angle [°]:** H160

**Illumination-level setpoint by which the sensor detects movement [lx]:** 8-2000

**IP class:** 44

**Sensor range[m]:** max 6

**Kształt:** round

**Additional information:** The LED light source can only be replaced by qualified personnel (Kanlux service only)

**Additional information:** Any control panel or control equipment can only be replaced by qualified personnel (Kanlux service only)

**Additional information:** Containing product (CP)

**Mercury content:** no

**Luminous efficiency of the lamp [lm/W]:** 83

### PARAMETERS FOR LED AND OLED LIGHT SOURCES:

**Energy consumption in on-mode of the light source (kWh/1000h):** 13

**Energy efficiency class of the light source in the contains product (CP):** D

**Number of modules (LED light source):** 1

**Useful luminous flux of the light source Φuse [lm]:** 2000

**Useful luminous flux of the light source Φuse [lm]:** in sphere (360°)

**Correlated colour temperature [K]:** 4000

**Colour consistency in McAdam ellipses :** 6

**On-mode power of the light source Pon [W]:** 13

**Height of the light source [mm]:** 207

**Width of the light source [mm]:** 162

**Depth of the light source [mm]:** 2

**Colour rendering index:** 80

**Chromaticity coordinates (x):** 0.377

**Chromaticity coordinates (y):** 0.377

**Claim of equivalent power [W]:** 125

**R9 colour rendering index value :** 15

**Survival factor:** 0.9

**The lumen maintenance factor:** 0.93

## 26520 SANSO LED 15W-NW-SE

Ceiling-mounted LED light fitting

### PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

**Displacement factor ( $\cos \phi_1$ ): 0.8**

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 10

**Number of units in the secondary packaging :** 1

**Number of units in the packaging :** 10

**Net unit weight [g]:** 520

**Grammage [g]:** 688

**Gross unit weight [g]:** 646

**Length of a unit pack [cm]:** 25.5

**Width of a unit pack [cm]:** 6.5

**Height of a unit pack [cm]:** 25.5

**Weight of a cardboard box [kg]:** 6.88

**Width of a cardboard box [cm]:** 27


**Height of a cardboard box [cm]:** 28

**Length of a cardboard box [cm] :** 66

**Volume of a cardboard box [m<sup>3</sup>]:** 0.049896

### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

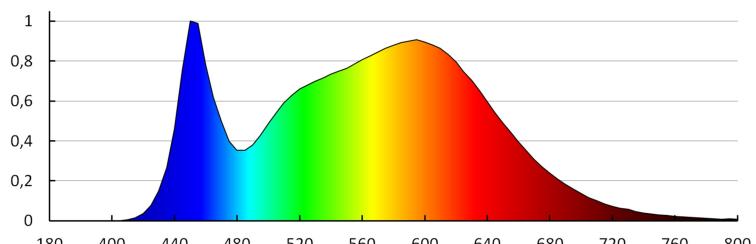


## 26520 SANSO LED 15W-NW-SE

### Ceiling-mounted LED light fitting

KANLUX S.A. (kat 26520) SANSO LED 15W-NW-SE / Krzywa rozszerzenia światła (biegunowo)

Oprawa: KANLUX S.A. (kat 26520) SANSO LED 15W-NW-SE  
Lampy: 1 x SANSO LED 15W-NW-SE

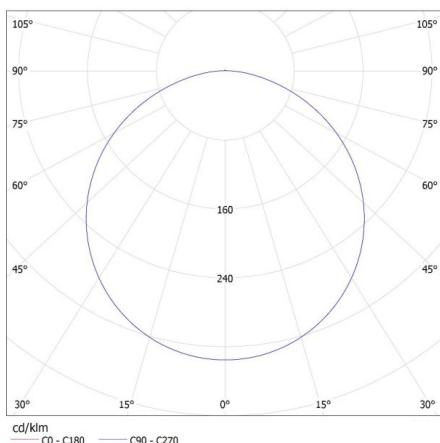

Date of issue: 27.02.2025, 13:25

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com