


26616 ARTO 3L-SR

Downlight fitting

5905339266163

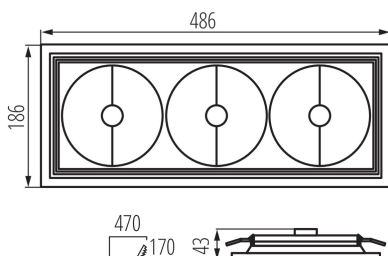

Kanlux ARTO luminaires are designed for AR111 light sources. The luminaire is discrete, has a simple design and allows for adjusting the angle of light incidence.

PRODUCT PARAMETERS:**Colour:** silver**Place of assembly:** Recessed mount in the ceiling**Place of application:** Indoors**Minimum distance from the illuminated object:** 1m**The product is not suitable to be covered with a heat-insulating material:** yes**Light source included:** no**Length [mm]:** 486**Width [mm]:** 186**Height [mm]:** 43**Assembly hole [mm]:** 470x170**Rated voltage [V]:** 12 AC; 12 DC**Maximum power [W]:** 3 x max 35**Class of protection against electric shock:** III**Light source:** AR-111**Cap:** G53**Ambient temperature range to which the product can be exposed:** 5÷25**Enclosure material:** steel**Connection type:** Free cable ends**Lighting-fixture angle regulation:** in two axes**Lighting-fixture angle regulation [°]:** 15/15**IP class:** 20**LOGISTIC DATA:****Packaging method:** 20**Number of units in the secondary packaging:** 1**Number of units in the packaging:** 20**Net unit weight [g]:** 700**Grammage [g]:** 906**Length of a unit pack [cm]:** 49**Width of a unit pack [cm]:** 4.5**Height of a unit pack [cm]:** 20**Weight of a cardboard box [kg]:** 18.12**Width of a cardboard box [cm]:** 49**Height of a cardboard box [cm]:** 42.5**Length of a cardboard box [cm]:** 51**Volume of a cardboard box [m³]:** 0.106208

26616 ARTO 3L-SR

Downlight fitting

