


26681 ASTEN LED IP44 12W-NW

LED wall mounted fitting

5905339266811




Kanlux ASTEN LED is a linear wall luminaire to be used in places with increased humidity (IP44). You can easily mount it above the bathroom mirror. The lamp has a built-in light source based on SMD LED diodes, which lifetime is at least 25,000 hours.

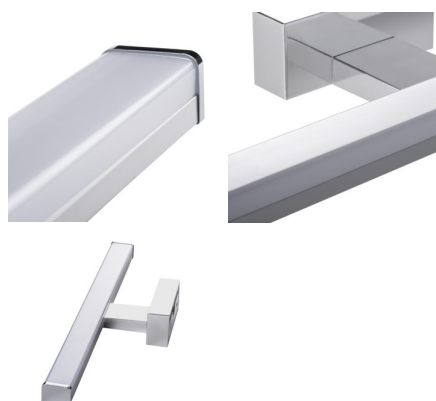TYPE OF LIGHT SOURCE:**Lighting technology used:** LED**Non-directional or directional light source:** NDLS**Mains or non-mains light source:** NMLS**Connected light source (CLS):** no**Colour-tuneable light source:** no**High luminance light source:** no**Anti-glare shield:** no**Dimmable:** no**PRODUCT PARAMETERS:****Colour:** chrome**Place of assembly:** wall mounted**Place of application:** Indoors**Minimum distance from the illuminated object:** 0,1m**Compatible with a dimmer:** no**Fixture lighting direction:** down**Length [mm]:** 600**Width [mm]:** 110**Height [mm]:** 42**Mercury content:** no**Integrated LED light source:** yes**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50**Maximum power [W]:** 12**Class of protection against electric shock:** II**Lampshade material:** plastic**Diode type:** LED SMD**Diode type:** LED SMD**LED module:** W600C40-66V-66-2835-SS**Luminous flux [lm]:** 1010**Colour temperature:** white**Service life [h]:** 25000**Number of on/off cycles:** ≥ 15000 **Lighting angle [°]:** X120/Y105**Ambient temperature range to which the product can be exposed:** 5÷30**Enclosure material:** aluminum alloy**Connection type:** Bolt terminal block

26681 ASTEN LED IP44 12W-NW

LED wall mounted fitting



Range of sections of wires used [mm²]: 0,75÷1,5

Lamp-heating time [s]: ≤1

Lamp-ignition time [s]: ≤0,5

IP class: 44

Additional information: The LED light source can only be replaced by qualified personnel (Kanlux service only)

Additional information: Any control panel or control equipment can only be replaced by qualified personnel (Kanlux service only)

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source (kWh/1000h): 12

Energy efficiency class: E

Useful luminous flux of the light source Φ_{use} [lm]: 1450

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: ≤6

On-mode power of the light source P_{on} [W]: 11.2

Height of the light source [mm]: 20

Width of the light source [mm]: 595

Depth of the light source [mm]: 1

Colour rendering index: 80

Chromaticity coordinates (x): 0,38

Chromaticity coordinates (y): 0,38

R9 colour rendering index value: 11

Survival factor: 0,9

The lumen maintenance factor: 0,95

PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

LOGISTIC DATA:

Packaging method: 20

Number of units in the secondary packaging: 1

Number of units in the packaging: 20

Net unit weight [g]: 290

Grammage [g]: 502.5

Length of a unit pack [cm]: 13

Width of a unit pack [cm]: 5

Height of a unit pack [cm]: 61

Weight of a cardboard box [kg]: 10.05

Width of a cardboard box [cm]: 54


Height of a cardboard box [cm]: 27

Length of a cardboard box [cm]: 64

Volume of a cardboard box [m³]: 0.093312

26681 ASTEN LED IP44 12W-NW

LED wall mounted fitting

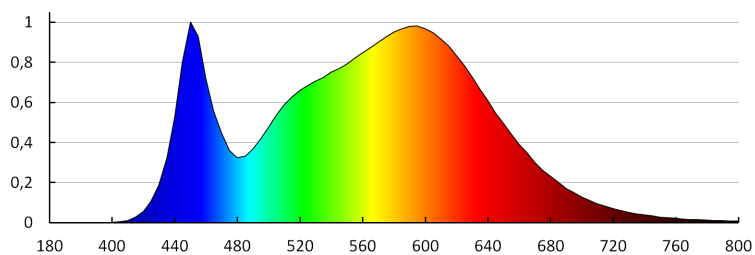

KANLUX S.A. (kat 26681) ASTEN LED IP44 12W-NW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 26681) ASTEN LED IP44 12W-NW
Lamps: 1 x ASTEN 12W

