

26685 ASTEN IP44 15W-NW-B

LED wall mounted fitting

5905339266859

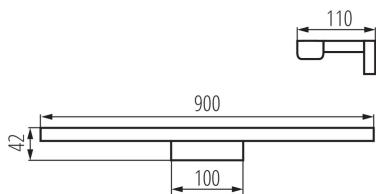


Kanlux ASTEN LED is a linear wall luminaire to be used in places with increased humidity (IP44). You can easily mount it above the bathroom mirror. The lamp has a built-in light source based on SMD LED diodes, which lifetime is at least 25,000 hours.

TYPE OF LIGHT SOURCE:**Lighting technology used:** LED**Non-directional or directional light source:** NDLS**Mains or non-mains light source:** NMLS**Connected light source (CLS):** no**Colour-tuneable light source:** no**High luminance light source:** no**Anti-glare shield:** no**Dimmable:** no**PRODUCT PARAMETERS:****Colour:** black**Place of assembly:** wall mounted**Place of application:** Indoors**Minimum distance from the illuminated object:** 0,1m**Compatible with a dimmer:** no**Fixture lighting direction:** down**Length [mm]:** 900**Width [mm]:** 100**Height [mm]:** 42**Mercury content:** no**Integrated LED light source:** yes**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50**Maximum power [W]:** 15**Class of protection against electric shock:** II**Lampshade material:** plastic**Diode type:** LED SMD**Diode type:** LED SMD**LED module:** W900C40-75V-100-2835-SS**Luminous flux [lm]:** 1230**Colour temperature:** white**Service life [h]:** 25000**Number of on/off cycles:** ≥15000**Lighting angle [°]:** X120/Y105**Ambient temperature range to which the product can be exposed:** 5-30**Enclosure material:** aluminum alloy**Connection type:** Bolt terminal block

26685 ASTEN IP44 15W-NW-B

LED wall mounted fitting

**Range of sections of wires used [mm²]:** 0,75÷1,5**Lamp-heating time [s]:** ≤1**Lamp-ignition time [s]:** ≤0,5**IP class:** 44**Additional information:** The LED light source can only be replaced by qualified personnel (Kanlux service only)**Additional information:** Any control panel or control equipment can only be replaced by qualified personnel (Kanlux service only)**PARAMETERS FOR LED AND OLED LIGHT SOURCES:****Energy consumption in on-mode of the light source (kWh/1000h):** 14**Energy efficiency class:** E**Useful luminous flux of the light source Φuse [lm]:** 1900**Correlated colour temperature [K]:** 4000**Colour consistency in McAdam ellipses:** ≤6**On-mode power of the light source P_{on} [W]:** 14**Height of the light source [mm]:** 20**Width of the light source [mm]:** 895**Depth of the light source [mm]:** 1**Colour rendering index:** 80**Chromaticity coordinates (x):** 0,38**Chromaticity coordinates (y):** 0,38**R9 colour rendering index value:** 11**Survival factor:** 0,9**The lumen maintenance factor:** 0,95**PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:****LED light source replaces a fluorescent light source without integrated ballast of a particular wattage:** Not applicable**LOGISTIC DATA:****Packaging method:** 10**Number of units in the secondary packaging:** 1**Number of units in the packaging:** 10**Net unit weight [g]:** 370**Grammage [g]:** 675**Length of a unit pack [cm]:** 13**Width of a unit pack [cm]:** 5**Height of a unit pack [cm]:** 91**Weight of a cardboard box [kg]:** 6.75**Width of a cardboard box [cm]:** 27.5**Height of a cardboard box [cm]:** 27.5**Length of a cardboard box [cm]:** 93**Volume of a cardboard box [m³]:** 0.070331

26685 ASTEN IP44 15W-NW-B

LED wall mounted fitting

KANLUX S.A. (kat 26685) ASTEN IP44 15W-NW-B / LDC (Polar)

Luminaire: KANLUX S.A. (kat 26685) ASTEN IP44 15W-NW-B
Lamps: 1 x ASTEN 15W