


26700 ROLSO LED IP44 15W-NW

Wall-mounted LED light fitting, IP44

5905339267009




Kanlux ROLSO LED is a modern LED home holder whose additional asset is subtle design which perfectly cooperates in particular with modern interiors. This holder will work well as lighting of bathrooms, thanks to the IP44 coefficient.

PRODUCT PARAMETERS:**Colour:** white / chrome**Place of assembly:** wall mounted, ceiling mounted**Place of application:** Indoors**Minimum distance from the illuminated object:** 0,1m**Compatible with a dimmer:** no**On switch:** yes**Length [mm]:** 600**Width [mm]:** 65**Height [mm]:** 53**Integrated LED light source:** yes**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50**Maximum power [W]:** 15**Class of protection against electric shock:** II**Lampshade material:** plastic**Diode type:** LED SMD**Diode type:** LED SMD**LED module:** W600S50-90V-2835-30-SS**Luminous flux [lm]:** 1470**Colour temperature:** white**Service life [h]:** 25000**Number of on/off cycles:** ≥ 15000 **Ambient temperature range to which the product can be exposed:** 5÷30**Enclosure material:** aluminum alloy**Connection type:** Bolt terminal block**Range of sections of wires used [mm²]:** 0,75÷1,5**Lamp-heating time [s]:** ≤ 1 **Lamp-ignition time [s]:** $\leq 0,5$ **IP class:** 44**PARAMETERS FOR LED AND OLED LIGHT SOURCES:****Energy efficiency class:** E**Correlated colour temperature [K]:** 4000**Colour consistency in McAdam ellipses:** ≤ 6 **Colour rendering index:** 80

26700 ROLSO LED IP44 15W-NW

Wall-mounted LED light fitting, IP44



LOGISTIC DATA:

Packaging method: 10

Number of units in the secondary packaging: 1

Number of units in the packaging: 10

Net unit weight [g]: 456

Grammage [g]: 640

Length of a unit pack [cm]: 62.5

Width of a unit pack [cm]: 7.5

Height of a unit pack [cm]: 6


Weight of a cardboard box [kg]: 6.4

Width of a cardboard box [cm]: 32

Height of a cardboard box [cm]: 17

Length of a cardboard box [cm]: 65

Volume of a cardboard box [m³]: 0.03536

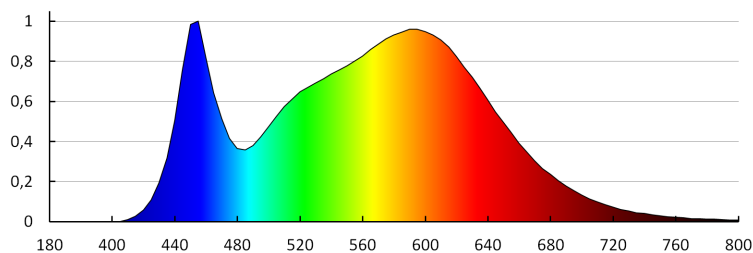

KANLUX S.A. (kat 26700) ROLSO LED IP44 15W-NW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 26700) ROLSO LED IP44 15W-NW
Lampa: 1 x ROLSO LED IP44 15W-NW

