

# iQ-LED

## Kanlux

ul. Objazdowa 1-3, 41-922 Radzionków, Poland


### 27270 IQ-LED A60 5,5W-WW

LED light source

5905339272706



IQ-LED A60 5,5W, IQ-LED A60 9W, IQ-LED A60 10,5W



The Kanlux IQ-LED means photobiological safety and eye-friendly colour temperature and reliability, all in the classic A60 design. iQ-LED bulbs provide full comfort of use and safety.

#### TYPE OF LIGHT SOURCE:

**Lighting technology used:** LED  
**Non-directional or directional light source :** NDLS  
**Mains or non-mains light source :** MLS  
**Connected light source (CLS):** no  
**Colour-tuneable light source:** no  
**High luminance light source:** no  
**Anti-glare shield:** no  
**Dimmable:** no

#### PRODUCT PARAMETERS:

**Colour:** white  
**Compatible with a dimmer:** no  
**Width [mm]:** 60  
**Height [mm]:** 110  
**Depth [mm]:** 60  
**Diameter [mm]:** 60  
**Rated voltage [V]:** 220-240 AC  
**Rated frequency [Hz]:** 50  
**Lamp rated current [mA]:** 43  
**Rated power [W]:** 5.5  
**Total rated luminous flux [lm]:** 470  
**Rated beam angle [°]:** 240  
**Material:** plastic  
**Lampshade material:** plastic  
**Light source:** A60  
**Diode type:** LED SMD  
**Colour temperature:** Warm white  
**Cap:** E27  
**Rated lamp-service life [h]:** 15000  
**Number of on/off cycles:** ≥40000  
**Light source shape:** standard  
**Additional information:** Light source (LS)

Date of issue: 02.02.2024, 17:31

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

EN

### 27270 IQ-LED A60 5,5W-WW

#### LED light source



Mercury content: no

#### PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source

(kWh/1000h): 6

Energy efficiency class: F

Useful luminous flux of the light source  $\Phi_{use}$  [lm] : 470

Useful luminous flux of the light source  $\Phi_{use}$  [lm] : in sphere (360°)

Correlated colour temperature [K] : 2700

Colour consistency in McAdam ellipses :  $\leq 6$

On-mode power of the light source  $P_{on}$  [W] : 5.5

Height of the light source [mm] : 110

Width of the light source [mm] : 60

Depth of the light source [mm] : 60

Colour rendering index: 80

Chromaticity coordinates (x): 0.458

Chromaticity coordinates (y): 0.41

Claim of equivalent power [W]: 40

R9 colour rendering index value : 10

Survival factor:  $\geq 0.9$

The lumen maintenance factor: 0.93

#### PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

Displacement factor ( $\cos \phi_1$ ): 0.5

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

Flicker metric (Pst LM) : 1,0

Stroboscopic effect metric (SVM) : 0.4

#### LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 10

Number of units in the secondary packaging : 10

Number of units in the packaging : 50

Net unit weight [g] : 38


Grammage [g] : 84

Length of a unit pack [cm] : 6.5

Width of a unit pack [cm] : 6

**27270 IQ-LED A60 5,5W-WW**

LED light source

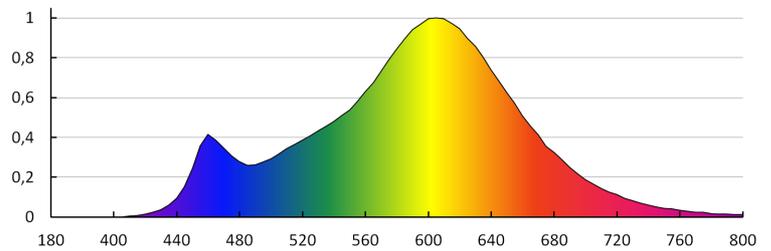**Height of a unit pack [cm]: 11.5****Weight of a cardboard box [kg]: 4.2****Width of a cardboard box [cm]: 34.5****Height of a cardboard box [cm]: 15****Length of a cardboard box [cm] : 69.5****Volume of a cardboard box [m<sup>3</sup>]: 0.035966**

KANLUX S.A. (kat 27270) IQ-LED A60 5,5W-WW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 27270) IQ-LED A60 5,5W-WW  
Lamps: 1 x IQ-LED A60 5,5W-WW