

27330 STREET LED 4000 NW

Parking lighting LED

5905339273307



The Kanlux STREET LED is equipped with very-high quality LED's, which are fitted in replaceable modules. Their efficacy is at least 130 lumen for 1 Watt! Their modern design fits in very well with urban spaces. We recommend the ADTR15D adapter for these fixtures.

PRODUCT PARAMETERS:

Colour: grey

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 1m

Compatible with a dimmer: no

Length [mm]: 265

Width [mm]: 74

Height [mm]: 354

Integrated LED light source: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 30

Class of protection against electric shock: I

Lampshade material: plastic

Diode type: LED SMD

Luminous flux [lm]: 3900

Colour temperature: white

Service life [h]: 35000

Number of on/off cycles: ≥ 20000

Lighting angle [°]: X100/Y145

Ambient temperature range to which the product can be exposed: -35÷40

Enclosure material: aluminum alloy

Connection type: Free cable ends

Wire length [m]: 0.4

Wire diameter [mm²]: 1

Lamp-heating time [s]: ≤ 1

Lamp-ignition time [s]: $\leq 0,5$

IP class: 65

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy efficiency class: D



Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: ≤ 6

Colour rendering index: 70

27330 STREET LED 4000 NW

Parking lighting LED

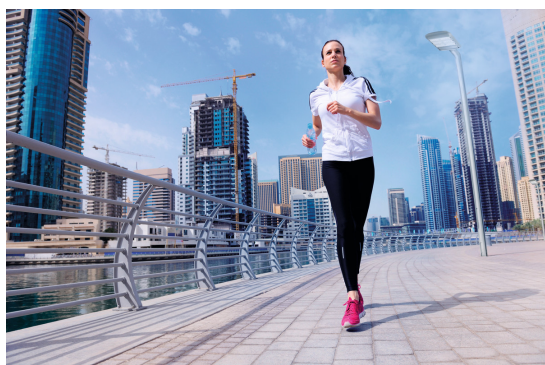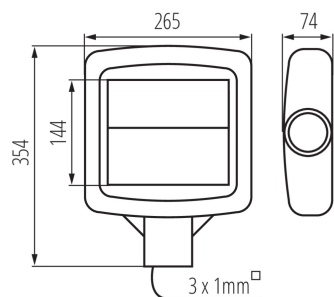

LOGISTIC DATA:

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 1822

Grammage [g]: 2200

Length of a unit pack [cm]: 38.5

Width of a unit pack [cm]: 13

Height of a unit pack [cm]: 31.5

Weight of a cardboard box [kg]: 2.2

Width of a cardboard box [cm]: 13


Height of a cardboard box [cm]: 31.5

Length of a cardboard box [cm]: 38.5

Volume of a cardboard box [m³]: 0.015766



ADDITIONAL INFORMATION:

- STREET LED ADTR 15D Two adjustment ranges: - adaptor in a vertical position - with adjustments from -15° to $+15^{\circ}$ - adaptor in an right angle position (90 degrees) - with adjustments from -5° to $+15^{\circ}$

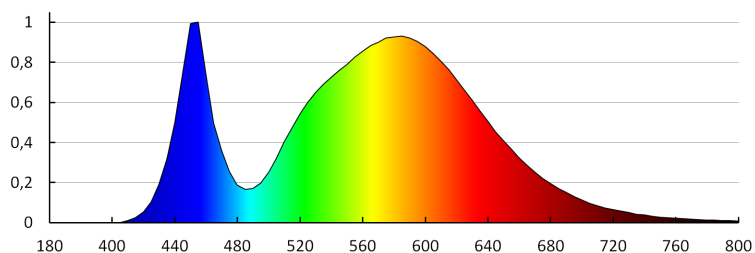

KANLUX S.A. (kat 27330) STREET LED 4000 NW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 27330) STREET LED 4000 NW
Lamps: 1 x STREET LED 4000 NW

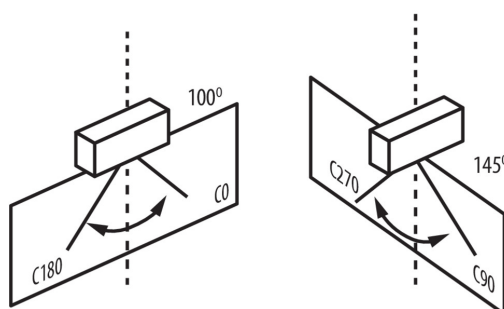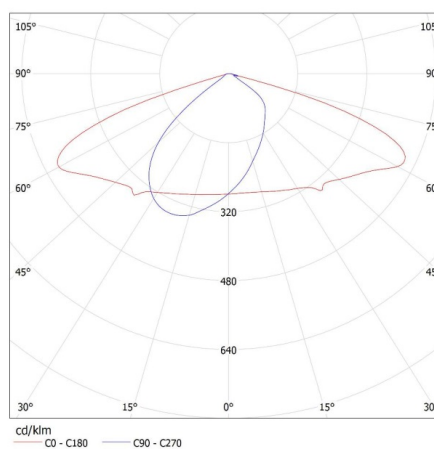

27330 STREET LED 4000 NW

Parking lighting LED

ACCESSORIES:

27333 STREET LED ADTR 15D



Adjustable adaptor intended for installing STREET LED parking fixtures on vertical posts with \varnothing 60mm to \varnothing 63mm diameter ends.