
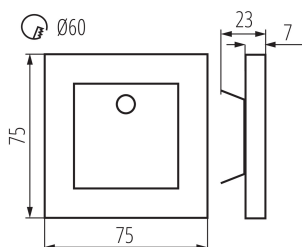


27370 APUS LED PIR WW

Staircase LED light fitting

5905339273703

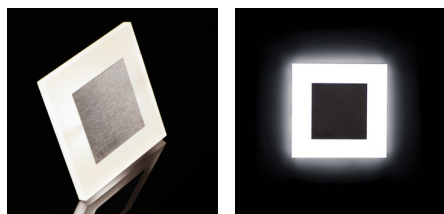

Kanlux APUS means modern design combined with an attractive effect of lighting. It is a perfect idea to highlight stairs and corridors or to emphasize decor of rooms. The unique structure of the holders ensures even emission of light. The AC version is equipped with 230V power supply unit which fits into a box and the PIR version is equipped with a motion sensor. The sensor detects movement / turns lights on regardless of the ambient light intensity.

PRODUCT PARAMETERS:**To be built into the wall :** yes**Colour:** stainless steel**Place of assembly:** Recessed mount in the wall**Place of application:** Indoors**Minimum distance from the illuminated object :** 0,1m**Compatible with a dimmer:** no**Wykrywanie ruchu:** yes**Length [mm]:** 75**Width [mm]:** 23**Height [mm]:** 75**Required diameter of the assembly box [Ømm]:** 60**Assembly-hole dimensions [mm]:** 60**Integrated LED light source :** yes**Rated voltage [V]:** 12 DC**Maximum power [W]:** 0.8**Class of protection against electric shock :** III**Lampshade material:** plastic**Diode type:** LED SMD**Luminous flux [lm]:** 13**Colour temperature:** Warm white**Service life [h]:** 50000**Number of on/off cycles:** ≥20000**Ambient temperature range to which the product can be exposed:** 5÷25**Enclosure material:** polished stainless steel, plastic**Sensor type:** PIR**Connection type:** Free cable ends**Wire length [m]:** 0.18**Sensor-operation time [second-minute]:** 60--**Lamp-heating time [s]:** ≤1**Lamp-ignition time [s]:** ≤0,5**sensor working angle [°]:** H90/V40**IP class:** 20**Sensor range[m]:** max 5

27370 APUS LED PIR WW

Staircase LED light fitting



Additional information: nie podlega pod rozporządzenie 2019/2020

Luminous efficiency of the lamp [lm/W]: 16

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Correlated colour temperature [K]: 3000

Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 80

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 100

Number of units in the secondary packaging: 1

Number of units in the packaging: 100

Net unit weight [g]: 84

Grammage [g]: 102.9

Length of a unit pack [cm]: 11

Width of a unit pack [cm]: 2.5

Height of a unit pack [cm]: 16.5


Weight of a cardboard box [kg]: 10.29

Width of a cardboard box [cm]: 24

Height of a cardboard box [cm]: 35.5

Length of a cardboard box [cm]: 63.5

Volume of a cardboard box [m³]: 0.054102

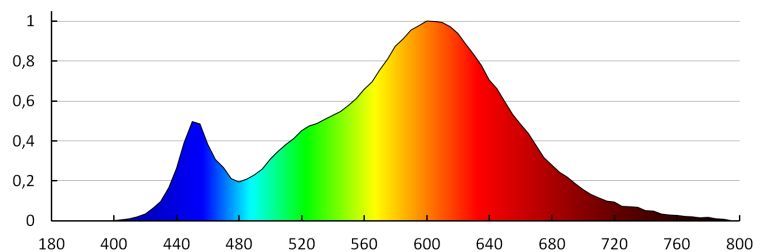

27370 APUS LED PIR WW

Staircase LED light fitting

KANLUX S.A. (kat 27370) APUS LED PIR-WW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 27370) APUS LED PIR-WW
Lamps: 1 x APUS LED WW

