




28455 AL 4LED 150-MPR-W

T8 LED tube linear fittings

5905339284556



PRODUCT PARAMETERS:

Colour: white

Place of assembly: for suspension on the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Light source included: no

Fixture lighting direction: down

Power supply of T8 LED fluorescent lamps: Unilateral

Length [mm]: 1540

Width [mm]: 60

Height [mm]: 69

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: max 58

Class of protection against electric shock: I

Lampshade material: plastic

Light source: T8 LED

Cap: G13

Ambient temperature range to which the product can be exposed: 5÷25

Shade type: microprismatic

Enclosure material: aluminum alloy

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1,5÷2,5

IP class: 20

LOGISTIC DATA:

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 2180

Grammage [g]: 2630

Length of a unit pack [cm]: 182

Width of a unit pack [cm]: 11

Height of a unit pack [cm]: 7

Weight of a cardboard box [kg]: 2.63

Width of a cardboard box [cm]: 11

Height of a cardboard box [cm]: 7

Length of a cardboard box [cm]: 182

Volume of a cardboard box [m³]: 0.014014


28455 AL 4LED 150-MPR-W

T8 LED tube linear fittings




KANLUX S.A. (kat 28455) AL 4LED 150-MPR-W + GLASSv4 / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28455) AL 4LED 150-MPR-W + GLASSv4
Lamps: 1 x T8 LED GLASSv4 24W-NW

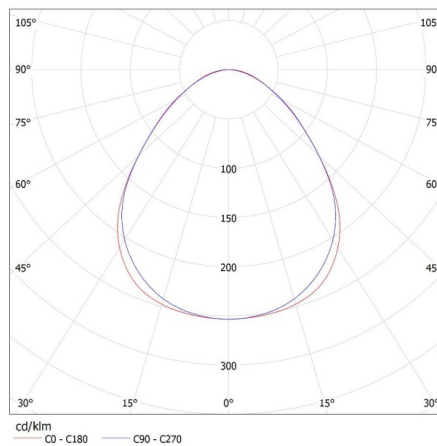

KANLUX S.A. (kat 28455) AL 4LED 150-MPR-W + GLASSv3 / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28455) AL 4LED 150-MPR-W + GLASSv3
Lamps: 1 x T8 LED GLASSv3 24W-NW

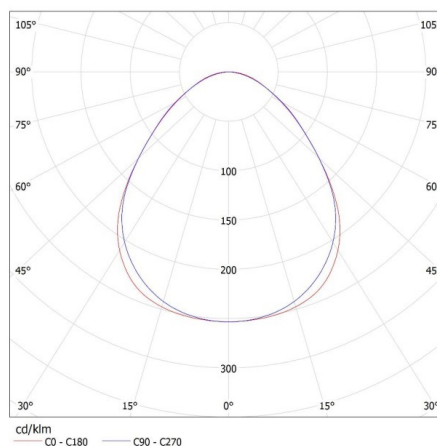


28455 AL 4LED 150-MPR-W

T8 LED tube linear fittings

KANLUX S.A. (kat 28455) AL 4LED 150-MPR-W + GLASSv2 / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28455) AL 4LED 150-MPR-W + GLASSv2
Lamps: 1 x T8 LED GLASSv2 24W-NW

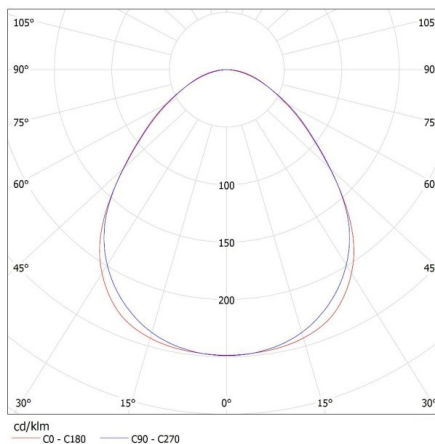

KANLUX S.A. (kat 28455) AL 4LED 150-MPR-W + Miledo / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28455) AL 4LED 150-MPR-W + Miledo
Lamps: 1 x T8 LED 22W-NW

