


28868 FTHL1500 73W-840-INT

LED dustproof lighting fitting

5905339288684



PRODUCT PARAMETERS:

Colour: grey

Place of assembly: ceiling mounted, wall mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Possibility of fixture-loop-through connection: yes

Compatible with a dimmer: DALI

Length [mm]: 1480

Width [mm]: 80

Height [mm]: 70

Integrated LED light source: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 73

Class of protection against electric shock: I

Lampshade material: PC

Diode type: LED SMD

Luminous flux [lm]: 9800

Colour temperature: white

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life: L90B10

Number of on/off cycles: ≥ 30000

Lighting angle [°]: X70/Y95

Ambient temperature range to which the product can be exposed: $-25 \div 35$

Shade type: prismatic, narrow-beam

Enclosure material: PC

Connection type: Self-clamping block

Range of sections of wires used [mm²]: $0,5 \div 2,5$

Lamp-heating time [s]: ≤ 1

Lamp-ignition time [s]: $\leq 0,5$

Maximum number of loop-through-connected fixtures: 7

IK class: 08

IP class: 65

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: ≤ 3

Colour rendering index: 80

28868 FTHL1500 73W-840-INT

LED dustproof lighting fitting

LOGISTIC DATA:

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 2620

Grammage [g]: 2850

Length of a unit pack [cm]: 150

Width of a unit pack [cm]: 8

Height of a unit pack [cm]: 7

Weight of a cardboard box [kg]: 2.85

Width of a cardboard box [cm]: 9


Height of a cardboard box [cm]: 7.5

Length of a cardboard box [cm]: 150

Volume of a cardboard box [m³]: 0.010125

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

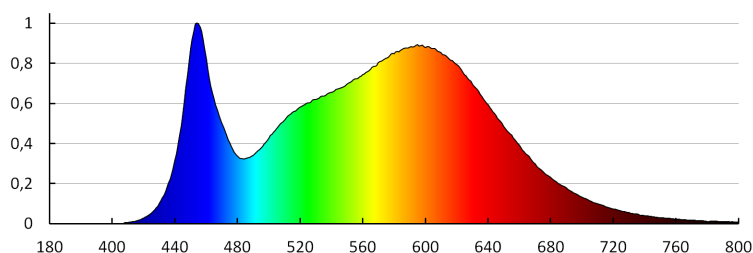

KANLUX S.A. (kat 28868) FTHL1500 73W-840-INT / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28868) FTHL1500 73W-840-INT
Lamps: 1 x FTHL1500 73W-840-INT

