


28943 KATRO V2LED 18W-NW-W

Downlight fitting

5905339289438

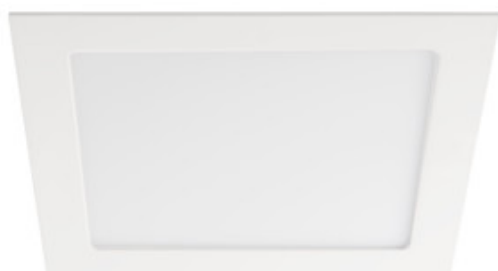


Kanlux KATRO V2LED is a new version of KATRO N LED luminaires, popular square downlights for indoor use. They combine aesthetic design with light obtained owing to LED technology. No water or dust can get to the inside owing to the high class of tightness (IP44).

TYPE OF LIGHT SOURCE:**Lighting technology used:** LED**Non-directional or directional light source:** NDLS**Mains or non-mains light source:** MLS**Connected light source (CLS):** no**Colour-tuneable light source:** no**Envelope:** none**High luminance light source:** no**Anti-glare shield:** no**Dimmable:** no**PRODUCT PARAMETERS:****Colour:** white**Place of assembly:** Recessed mount in the ceiling**Place of application:** Indoors**Minimum distance from the illuminated object:** 0,5m**Compatible with a dimmer:** no**The product is not suitable to be covered with a heat-insulating material:** yes**Length [mm]:** 225**Width [mm]:** 225**Height [mm]:** 20**Assembly hole [mm]:** 208x208**Integrated LED light source:** yes**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50**Maximum power [W]:** 18**Class of protection against electric shock:** II**Lampshade material:** plastic**Diode type:** LED SMD**Luminous flux [lm]:** 1260**Colour temperature:** white**Service life [h]:** 15000**Number of on/off cycles:** ≥ 20000 **Lighting angle [°]:** 110**Ambient temperature range to which the product can be exposed:** 5÷25**Enclosure material:** aluminum alloy**Reflector material:** 0.75

28943 KATRO V2LED 18W-NW-W

Downlight fitting

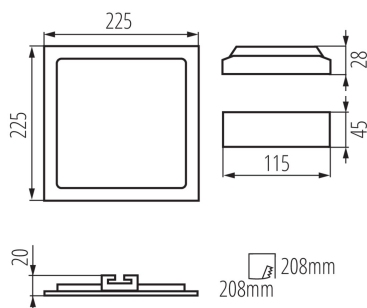

Connection type: Free cable ends

Wire length [m]: 0.05

Wire diameter [mm²]: 0.75

Lamp-heating time [s]: ≤1

Lamp-ignition time [s]: ≤0,5

IP class: 44/20

PARAMETERS FOR DIRECTIONAL LIGHT SOURCES:

Beam angle [°]: 110

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy efficiency class: E

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 80

PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

LOGISTIC DATA:

Packaging method: 20

Number of units in the secondary packaging: 1

Number of units in the packaging: 20

Net unit weight [g]: 470

Grammage [g]: 600

Length of a unit pack [cm]: 23

Width of a unit pack [cm]: 3

Height of a unit pack [cm]: 29


Weight of a cardboard box [kg]: 12

Width of a cardboard box [cm]: 34

Height of a cardboard box [cm]: 31

Length of a cardboard box [cm]: 48

Volume of a cardboard box [m³]: 0.050592

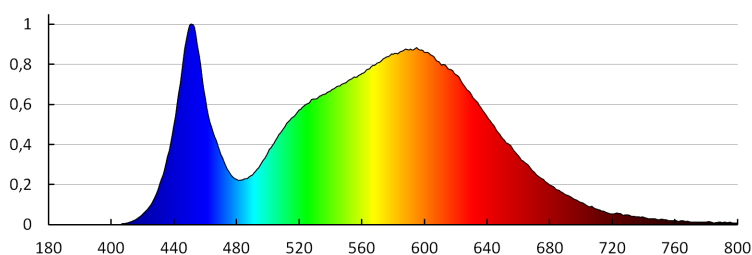

28943 KATRO V2LED 18W-NW-W

Downlight fitting

KANLUX S.A. (kat 28943) KATRO V2LED18W-NW-W / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28943) KATRO V2LED18W-NW-W
Lamps: 1 x KATRO V2LED18W-NW-W

