



28950 KANTI V2LED 12W-NW-W

Downlight fitting

5905339289506

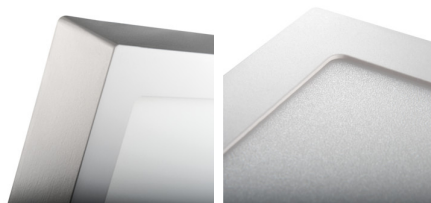

Kanlux KANTI V2 LED is a square façade luminaire characterised by harmonious combination of modern technology with attractive and modern looks. It is distinguished by high energy efficiency with maintained excellent light parameters. Kanlux KANTI V2 LED is perfect for lighting residential interiors and office rooms.

TYPE OF LIGHT SOURCE:

Lighting technology used: LED
Non-directional or directional light source: NDLS
Mains or non-mains light source: MLS
Connected light source (CLS): no
Colour-tuneable light source: no
Envelope: none
High luminance light source: no
Anti-glare shield: no
Dimmable: no

PRODUCT PARAMETERS:

Colour: white
Place of assembly: ceiling mounted
Place of application: Indoors
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
The product is not suitable to be covered with a heat-insulating material: yes
Length [mm]: 170
Width [mm]: 170
Height [mm]: 35
Integrated LED light source: yes
Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 12
Class of protection against electric shock: II
Lampshade material: plastic
Diode type: LED SMD
Luminous flux [lm]: 780
Colour temperature: white
Service life [h]: 15000
Number of on/off cycles: ≥20000
Lighting angle [°]: 110
Ambient temperature range to which the product can be exposed: 5÷25
Enclosure material: aluminum alloy
Connection type: Free cable ends

28950 KANTI V2LED 12W-NW-W

Downlight fitting



Wire length [m]: 0.05
Wire diameter [mm²]: 0.75
Lamp-heating time [s]: ≤1
Lamp-ignition time [s]: ≤0,5
IP class: 20

PARAMETERS FOR DIRECTIONAL LIGHT SOURCES:

Beam angle [°]: 110

PARAMETERS FOR LED AND OLED LIGHT SOURCES:


Energy efficiency class: E
Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: ≤6
Colour rendering index: 80

PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

LOGISTIC DATA:

Packaging method: 30
Number of units in the secondary packaging: 1
Number of units in the packaging: 30
Net unit weight [g]: 360
Grammage [g]: 456
Length of a unit pack [cm]: 17.5
Width of a unit pack [cm]: 4.5
Height of a unit pack [cm]: 17.5
Weight of a cardboard box [kg]: 13.68
Width of a cardboard box [cm]: 47.5
Height of a cardboard box [cm]: 20.5
Length of a cardboard box [cm]: 55
Volume of a cardboard box [m³]: 0.053556

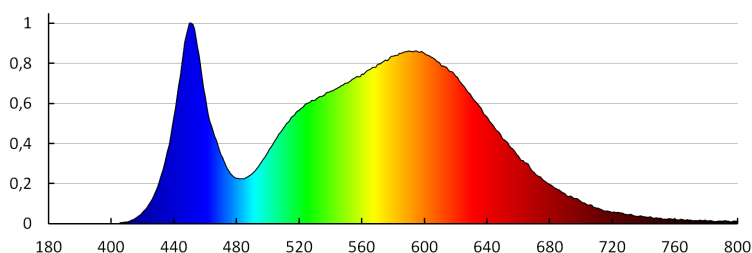

28950 KANTI V2LED 12W-NW-W

Downlight fitting

KANLUX S.A. (kat 28950) KANTI V2LED 12W-NW-W / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28950) KANTI V2LED 12W-NW-W
Lamps: 1 x KANTI V2LED 12W-NW-W

