


## 28990 REKA LED EL 7W-L-GR

Facade luminaire

5905339289902

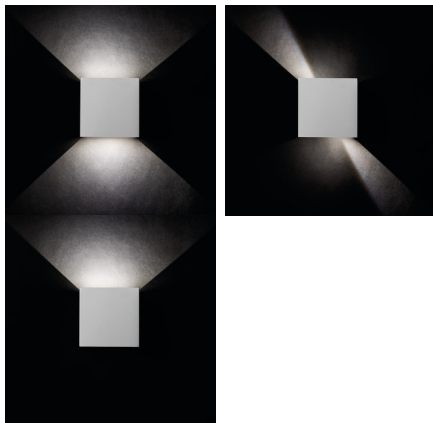

A visually interesting light effect, which we create by adjusting the angle of the light beam, is the basic advantage of Kanlux REKA LED. With the masking flaps, we can change the angle of illumination by ourselves - at the top and bottom of the luminaire. Kanlux REKA LED can be used to light interiors, as well as building facades due to its IP54 tightness.

### PRODUCT PARAMETERS:


**Colour:** graphite  
**Place of assembly:** wall mounted  
**Place of application:** Indoors and outdoors  
**Minimum distance from the illuminated object:** 0,5m  
**Compatible with a dimmer:** no  
**Wykrywanie ruchu:** no  
**Fixture lighting direction:** up and down  
**Length [mm]:** 100  
**Width [mm]:** 100  
**Height [mm]:** 100  
**Integrated LED light source:** yes  
**Rated voltage [V]:** 220-240 AC  
**Rated frequency [Hz]:** 50  
**Maximum power [W]:** 7  
**Class of protection against electric shock:** I  
**Diode type:** LED COB  
**Luminous flux [lm]:** max 360  
**Colour temperature:** white  
**Service life [h]:** 30000  
**Number of on/off cycles:**  $\geq 20000$   
**Lighting angle [°]:** max 90  
**Ambient temperature range to which the product can be exposed:** -15÷35  
**Enclosure material:** aluminum alloy  
**Protective glass material:** Tempered glass  
**Connection type:** Bolt terminal block  
**Range of sections of wires used [mm²]:** 1  
**Lamp-heating time [s]:**  $\leq 1$   
**Lamp-ignition time [s]:**  $\leq 0,5$   
**IP class:** 54

### PARAMETERS FOR LED AND OLED LIGHT SOURCES:

**Energy efficiency class:** F  
**Correlated colour temperature [K]:** 4000  
**Colour consistency in McAdam ellipses:**  $\leq 6$   
**Colour rendering index:** 80

## 28990 REKA LED EL 7W-L-GR

Facade luminaire



### LOGISTIC DATA:

**Packaging method:** 20

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 20

**Net unit weight [g]:** 560

**Grammage [g]:** 642

**Length of a unit pack [cm]:** 11

**Width of a unit pack [cm]:** 11

**Height of a unit pack [cm]:** 11

**Weight of a cardboard box [kg]:** 12.84

**Width of a cardboard box [cm]:** 23.5


**Height of a cardboard box [cm]:** 28

**Length of a cardboard box [cm]:** 57

**Volume of a cardboard box [m³]:** 0.037506

### ADDITIONAL INFORMATION:

- Beam-angle adjustment
- 5 years Warranty under the terms of the warranty statement, available on our website

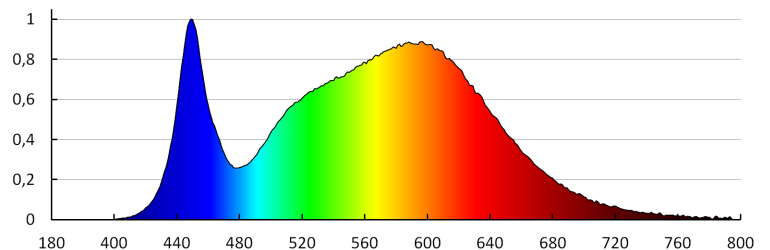

KANLUX S.A. (kat 28990) REKA LED EL 7W-L-GR / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28990) REKA LED EL 7W-L-GR  
Lamps: 1 x REKA LED EL 7W-L-GR

