

28991 REKA LED EL 7W-O-GR

Facade luminaire

5905339289919



The main advantage of Kanlux REKA LED is a visually unique light effect, which we create ourselves after switching on. Thanks to the wings placed at the bottom and top of the luminaire, we can decide on the direction and width of the luminous flux. The Kanlux REKA lamp shines in two directions - up and down - and the luminous flux can be set independently of each other, creating, for example, a perfectly thin line of light at the top, and at the bottom by setting wide light cascades that will flow from the lamp to the ground. Kanlux REKA LED can be used to illuminate the facades of buildings, terraces, balconies or gazebos' external walls.

PRODUCT PARAMETERS:

Colour: graphite

Place of assembly: wall mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Wykrywanie ruchu: no

Fixture lighting direction: up and down

Length [mm]: 135

Width [mm]: 115

Height [mm]: 100

Integrated LED light source: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 7

Class of protection against electric shock: I

Diode type: LED COB

Luminous flux [lm]: max 380

Colour temperature: white

Service life [h]: 30000

Number of on/off cycles: ≥20000

Lighting angle [°]: max 90

Ambient temperature range to which the product can be exposed: -15÷35

Enclosure material: aluminum alloy

Protective glass material: Tempered glass

Connection type: Bolt terminal block

Range of sections of wires used [mm²]: 1


Lamp-heating time [s]: ≤1

Lamp-ignition time [s]: ≤0,5


IP class: 54

28991 REKA LED EL 7W-O-GR

Facade luminaire

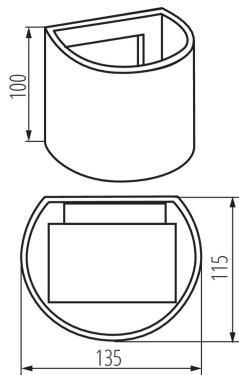**PARAMETERS FOR LED AND OLED LIGHT SOURCES:****Energy efficiency class:** F**Correlated colour temperature [K]:** 4000**Colour consistency in McAdam ellipses:** ≤ 6 **Colour rendering index:** 80**LOGISTIC DATA:****Packaging method:** 20**Number of units in the secondary packaging:** 1**Number of units in the packaging:** 20**Net unit weight [g]:** 570**Grammage [g]:** 678**Length of a unit pack [cm]:** 15**Width of a unit pack [cm]:** 12**Height of a unit pack [cm]:** 11**Weight of a cardboard box [kg]:** 13.56**Width of a cardboard box [cm]:** 31**Height of a cardboard box [cm]:** 25**Length of a cardboard box [cm]:** 62**Volume of a cardboard box [m³]:** 0.04805**ADDITIONAL INFORMATION:**

- Beam-angle adjustment
- 5 years Warranty under the terms of the warranty statement, available on our website

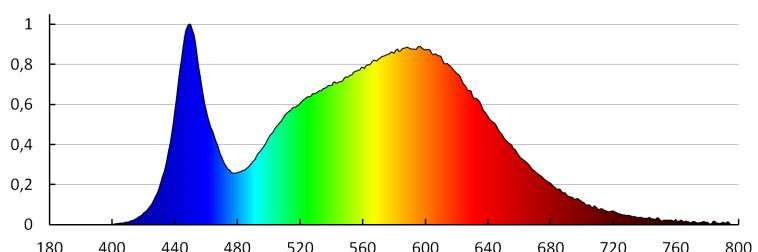

28991 REKA LED EL 7W-O-GR

Facade luminaire

KANLUX S.A. (kat 28991) REKA LED EL 7W-O-GR / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28991) REKA LED EL 7W-O-GR
Lamps: 1 x REKA LED EL 7W-O-GR