


28992 REKA LED EL 7W-L-W

Facade luminaire

5905339289926

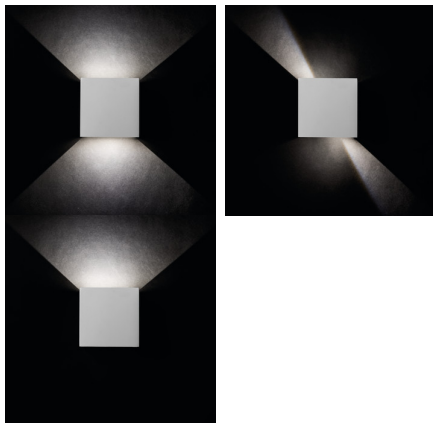


The main advantage of Kanlux REKA LED is a visually unique light effect, which we create ourselves after switching on. Thanks to the wings placed at the bottom and top of the luminaire, we can decide on the direction and width of the luminous flux. The Kanlux REKA lamp shines in two directions - up and down - and the luminous flux can be set independently of each other, creating, for example, a perfectly thin line of light at the top, and at the bottom by setting wide light cascades that will flow from the lamp to the ground. Kanlux REKA LED can be used to illuminate the facades of buildings, terraces, balconies or gazebos' external walls.

PRODUCT PARAMETERS:**Colour:** white**Place of assembly:** wall mounted**Place of application:** Indoors and outdoors**Minimum distance from the illuminated object:** 0,5m**Compatible with a dimmer:** no**Wykrywanie ruchu:** no**Fixture lighting direction:** up and down**Length [mm]:** 100**Width [mm]:** 100**Height [mm]:** 100**Integrated LED light source:** yes**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50**Maximum power [W]:** 7**Class of protection against electric shock:** I**Diode type:** LED COB**Luminous flux [lm]:** max 500**Colour temperature:** white**Service life [h]:** 30000**Number of on/off cycles:** ≥20000**Lighting angle [°]:** max 90**Ambient temperature range to which the product can be exposed:** -15÷35**Enclosure material:** aluminum alloy**Protective glass material:** Tempered glass**Connection type:** Bolt terminal block**Range of sections of wires used [mm²]:** 1**Lamp-heating time [s]:** ≤1**Lamp-ignition time [s]:** ≤0,5**IP class:** 54

28992 REKA LED EL 7W-L-W

Facade luminaire



PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy efficiency class: F

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: ≤ 6

Colour rendering index: 80

LOGISTIC DATA:

Packaging method: 20

Number of units in the secondary packaging: 1

Number of units in the packaging: 20

Net unit weight [g]: 560

Grammage [g]: 642

Length of a unit pack [cm]: 11

Width of a unit pack [cm]: 11

Height of a unit pack [cm]: 11

Weight of a cardboard box [kg]: 12.84

Width of a cardboard box [cm]: 23.5


Height of a cardboard box [cm]: 28

Length of a cardboard box [cm]: 57

Volume of a cardboard box [m³]: 0.037506

ADDITIONAL INFORMATION:

- Beam-angle adjustment
- 5 years Warranty under the terms of the warranty statement, available on our website

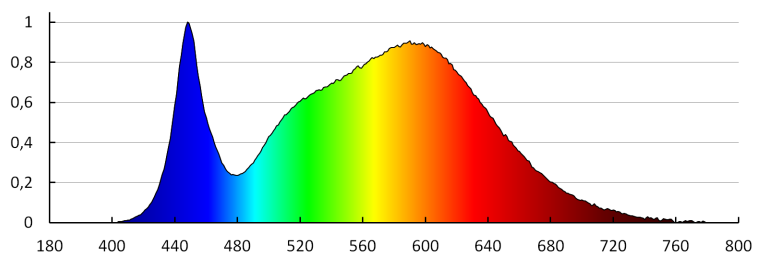

28992 REKA LED EL 7W-L-W

Facade luminaire

KANLUX S.A. (kat 28992) REKA LED EL 7W-L-W / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28992) REKA LED EL 7W-L-W
Lamps: 1 x REKA LED EL 7W-L-W

