


29129 LAURIN EL-4O B

Wall & ceiling lighting fitting

5905339291295



LAURIN EL-4O B

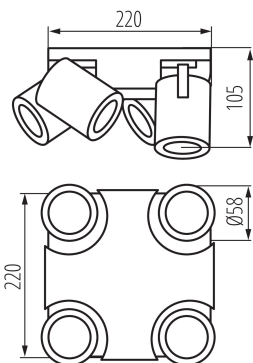

Kanlux LAURIN spotlights provide a very large selection of directional ceiling and wall lamps. The simple and minimalist design can be successfully used in many rooms in the house. Free adjustment of the luminous flux direction is an additional advantage of these fixtures.

PRODUCT PARAMETERS:

Colour: black

Place of assembly: wall mounted, ceiling mounted

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Light source included: no

Length [mm]: 220

Width [mm]: 220

Height [mm]: 108

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 4 x max 10

Class of protection against electric shock: I

Lampshade material: aluminum alloy

Light source: PAR16

Cap (Light source): GU10

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: aluminum alloy

Connection type: Bolt terminal block

Range of sections of wires used [mm²]: 1÷2,5

The fixture is movable horizontally [°]: 310

The fixture is movable vertically [°]: 90

Lighting-fixture angle regulation [°]: in two axes

IP class: 20

Kształt: round

Additional information: nie podlega pod rozporządzenie 2019/2020 - produkt na wymienne źródło światła

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 6

Number of units in the secondary packaging: 1

Number of units in the packaging: 6

Net unit weight [g]: 1110

Grammage [g]: 1313.33

29129 LAURIN EL-4O B

Wall & ceiling lighting fitting



Gross unit weight [g] : 1280

Length of a unit pack [cm] : 22.5

Width of a unit pack [cm] : 11

Height of a unit pack [cm] : 22.5

Weight of a cardboard box [kg] : 7.87998

Width of a cardboard box [cm] : 35.5

Height of a cardboard box [cm] : 25

Length of a cardboard box [cm] : 46

Volume of a cardboard box [m³] : 0.040825