


29605 XLED A60 10W-WW

LED light source

5905339296054




Kanlux XLED combines the best features of traditional bulbs and modern LED light sources. Therefore, we talk about it as the first real LED bulb. A glass bulb in the shape of a traditional bulb and LED diodes placed in such a way so that light can part in all directions, and the angle of light comes to even 320 degrees!

TYPE OF LIGHT SOURCE:**Lighting technology used:** LED**Non-directional or directional light source:** NDLS**Mains or non-mains light source:** MLS**Connected light source (CLS):** no**Colour-tuneable light source:** no**High luminance light source:** no**Anti-glare shield:** no**Dimmable:** no**PRODUCT PARAMETERS:****Colour:** transparent**Compatible with a dimmer:** no**Width [mm]:** 60**Height [mm]:** 105**Depth [mm]:** 60**Diameter [mm]:** 60**Mercury content:** no**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50**Lamp rated current [mA]:** 80**Rated power [W]:** 10**Total rated luminous flux [lm]:** 1520**Rated beam angle [°]:** 320**Lampshade material:** glass**Light source:** A60**Diode type:** LED FILAMENT**Colour temperature:** Warm white**Cap:** E27**Rated lamp-service life [h]:** 10000**Number of on/off cycles:** ≥15000**Light source shape:** standard**PARAMETERS FOR LED AND OLED LIGHT SOURCES:****Energy consumption in on-mode of the light source (kWh/1000h):** 10**Energy efficiency class:** D**Useful luminous flux of the light source Φ_{use} [lm]:** 1520**Useful luminous flux of the light source Φ_{use} [lm]:** in

29605 XLED A60 10W-WW

LED light source

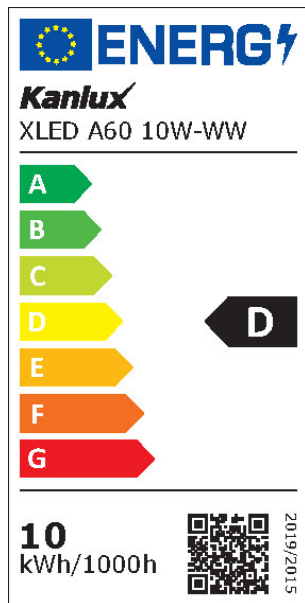

sphere (360°)

Correlated colour temperature [K]: 2700

Colour consistency in McAdam ellipses: ≤6

On-mode power of the light source P_{on} [W]: 10

Height of the light source [mm]: 105

Width of the light source [mm]: 60

Depth of the light source [mm]: 60

Colour rendering index: 80

Chromaticity coordinates (x): 0.458

Chromaticity coordinates (y): 0.41

Claim of equivalent power [W]: 99

R9 colour rendering index value: 16

Survival factor: ≥0.9

The lumen maintenance factor: 0.90

PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

Displacement factor ($\cos \phi_1$): 0.5

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

Flicker metric (P_{st} LM): ≤1,0

Stroboscopic effect metric (SVM): ≤0,4

LOGISTIC DATA:

Packaging method: 10

Number of units in the secondary packaging: 10

Number of units in the packaging: 100

Net unit weight [g]: 34

Grammage [g]: 66

Length of a unit pack [cm]: 6.5

Width of a unit pack [cm]: 6.5

Height of a unit pack [cm]: 12

Weight of a cardboard box [kg]: 6.6

Width of a cardboard box [cm]: 35.5

Height of a cardboard box [cm]: 26.5

Length of a cardboard box [cm]: 69

Volume of a cardboard box [m³]: 0.064912

