


31173 BAREV BL LEDN2 40W-NW

LED panel

8595665311735



TYPE OF LIGHT SOURCE:

Lighting technology used: LED
 Non-directional or directional light source : NDLS
 Mains or non-mains light source : NMLS
 Connected light source (CLS): no
 Colour-tuneable light source: no
 Anti-glare shield : no
 Dimmable: no

PRODUCT PARAMETERS:

Rated voltage [V]: 220-240 AC
 Rated frequency [Hz]: 50
 Maximum power [W]: 40
 Luminous flux of the light fitting [lm]: 4000
 Luminous efficiency of the lamp [lm/W]: 100
 Skuteczność świetlna [lm/W]: 100
 Lighting angle [°]: 110
 Correlated colour temperature [K]: 4000
 Colour consistency in McAdam ellipses : ≤6
 Colour temperature: white
 Colour rendering index: 80
 Service life [h]: 30000
 Number of on/off cycles : ≥15000
 Diode type: LED SMD
 Colour: white
 Place of assembly: ceiling mounted, Recessed mount in the ceiling (coffered ceiling)
 Place of application : Indoors
 Minimum distance from the illuminated object : 0,5m
 Compatible with a dimmer : no
 The product is not suitable to be covered with a heat-insulating material: yes
 Length [mm]: 595
 Width [mm]: 595
 Height [mm]: 28
 Integrated LED light source : yes
 Class of protection against electric shock : I
 Lampshade material: plastic
 Enclosure material: steel
 Ambient temperature range to which the product can be exposed: 5÷25
 Connection type: Terminal block

31173 BAREV BL LEDN2 40W-NW

LED panel



IP class: 20

Kształt: square

Additional information: Possibility of replacing the LED light source only by qualified personnel (only by the manufacturer service)

Additional information: Possibility of replacing the control equipment only by qualified personnel (only by the manufacturer service)

Additional information: Containing product (CP)

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy efficiency class of the light source in the contains product (CP): E

Number of modules (LED light source): 1

Useful luminous flux of the light source Φ_{use} [lm]: 5000

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Chromaticity coordinates (x): 0,38

Chromaticity coordinates (y): 0,38

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 6

Number of units in the secondary packaging: 1

Number of units in the packaging: 6

Net unit weight [g]: 1956

Grammage [g]: 2003.33

Length of a unit pack [cm]: 60.5

Width of a unit pack [cm]: 61

Height of a unit pack [cm]: 3

Weight of a cardboard box [kg]: 12.01998

Width of a cardboard box [cm]: 26


Height of a cardboard box [cm]: 63.5

Length of a cardboard box [cm]: 62

Volume of a cardboard box [m³]: 0.102362


31173 BAREV BL LEDN2 40W-NW

LED panel

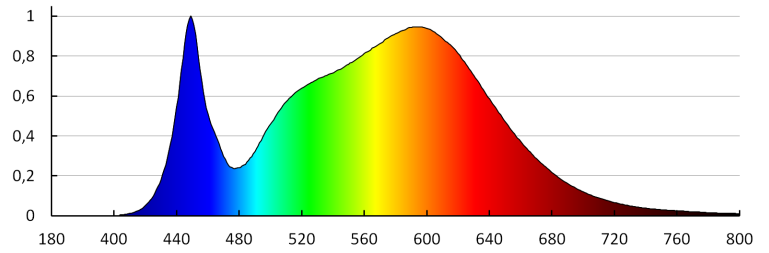

MILED0 (kat 31173) BAREV BL LEDN2 40W-NW / Krzywa rozsytu światła (biegunowo)

Oprawa: MILED0 (kat 31173) BAREV BL LEDN2 40W-NW
Lampy: 1 x BAREV BL LEDN2 40W-NW

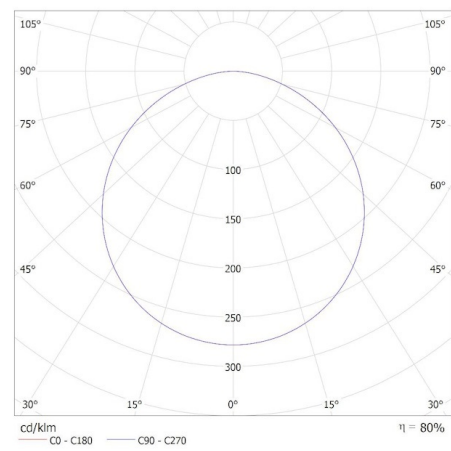

Date of issue: 23.04.2025, 08:45

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Aprisa s.r.o. Sadová 618, 738 01, Frýdek-Místek, Czech Republic aprisa@aprisa.cz