


31174 BAREV BL 40W 12030 NW

LED panel

8595665311742

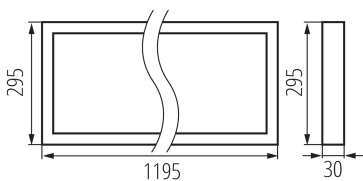

PRODUCT PARAMETERS:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 40

Luminous flux of the light fitting [lm]: 4000

Luminous efficiency of the lamp [lm/W]: 100

Skuteczność świetlna [lm/W]: 100

Lighting angle [°]: 110

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses : ≤6

Colour temperature: white

Colour rendering index: 80

Service life [h]: 30000

Number of on/off cycles: ≥15000

Diode type: LED SMD

Colour: white

Place of assembly: ceiling mounted, Recessed mount in the ceiling (coffered ceiling)

Place of application: Indoors

Minimum distance from the illuminated object : 0,5m

Compatible with a dimmer : no

The product is not suitable to be covered with a heat-insulating material: yes

Length [mm]: 1195

Width [mm]: 295

Height [mm]: 30

Integrated LED light source : yes

Class of protection against electric shock : I

Lampshade material: plastic

Enclosure material: steel

Ambient temperature range to which the product can be exposed: 5÷25

Connection type: Terminal block

IP class: 20

Kształt: rectangular

Additional information: Possibility of replacing the LED light source only by qualified personnel (only by the manufacturer service)

Additional information: Any control panel or control equipment can only be replaced by qualified personnel (Kanlux service only)

LED panel



Additional information: Containing product (CP)

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy efficiency class of the light source in the contains product (CP): E

Number of modules (LED light source): 3

Useful luminous flux of the light source Φ_{use} [lm]: 1520

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 6

Number of units in the secondary packaging : 1

Number of units in the packaging: 6

Net unit weight [g]: 2116

Grammage [g]: 2565

Gross unit weight [g]: 2412

Length of a unit pack [cm]: 120.5

Width of a unit pack [cm]: 30.5

Height of a unit pack [cm]: 4


Weight of a cardboard box [kg]: 15.39

Width of a cardboard box [cm]: 26

Height of a cardboard box [cm]: 33.5

Length of a cardboard box [cm]: 123

Volume of a cardboard box [m³]: 0.107133

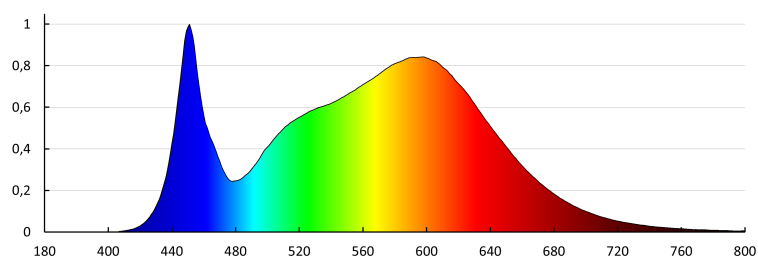


31174 BAREV BL 40W 12030 NW

LED panel

MILED0 (kat 31174) BAREV BL 40W 12030 NW / Krzywa rozsyłu światła
(biegunowo)

Oprawa: MILED0 (kat 31174) BAREV BL 40W 12030 NW
Lampy: 3 x BAREV BL 40W 12030 NW

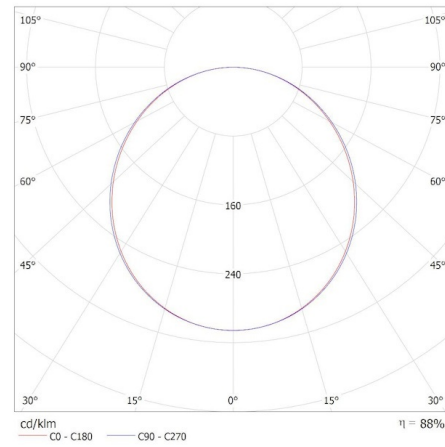

Date of issue: 23.04.2025, 08:45

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Aprisa s.r.o. Sadová 618, 738 01, Frýdek-Místek, Czech Republic aprisa@aprisa.cz