

31391 GRUN NV LED-20-B

LED floodlight

8595665313913



TYPE OF LIGHT SOURCE:



Lighting technology used: LED
 Non-directional or directional light source : DLS
 Mains or non-mains light source : MLS
 Connected light source (CLS): no
 Colour-tuneable light source: no
 High luminance light source: no
 Anti-glare shield : no
 Dimmable: no

PRODUCT PARAMETERS:

Colour: black
 Place of assembly: wall mounted, ceiling mounted, surface mounted
 Place of application : for industrial applications
 Minimum distance from the illuminated object : 0,5m
 Compatible with a dimmer : no
 Wykrywanie ruchu: no
 Width [mm]: 117
 Height [mm]: 106
 Depth [mm]: 25
 Rated voltage [V]: 220-240 AC
 Rated frequency [Hz]: 50
 Maximum power [W]: 20
 Class of protection against electric shock : I
 Lampshade material: Tempered glass
 Enclosure material: aluminum alloy
 Diode type: LED SMD
 Luminous flux [lm]: 1700
 Colour temperature: white
 Service life [h]: 25000
 Number of on/off cycles : ≥ 30000
 Lighting angle [°]: 110
 Ambient temperature range to which the product can be exposed: -15÷35
 Wire length [m]: 0.15
 Wire diameter [mm²]: 1
 Reflector type: symmetrical
 The fixture is movable vertically [°]: 130
 IP class: 65

31391 GRUN NV LED-20-B

LED floodlight

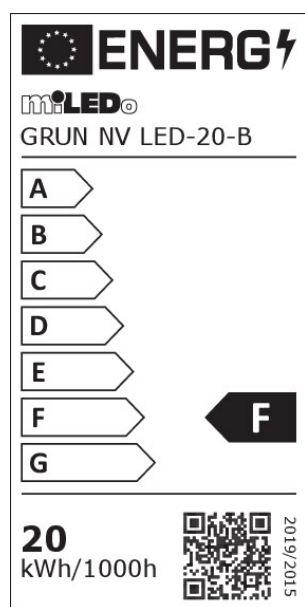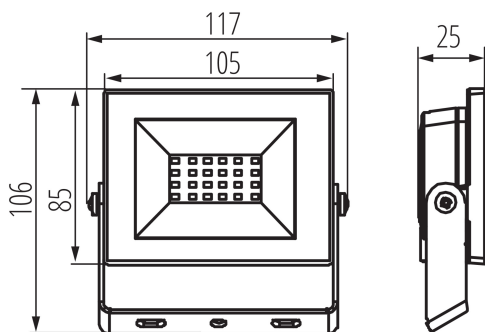

Additional information: Light source (LS)

Mercury content: no

Mercury content in the lamp [mg]: 0

Luminous efficiency of the lamp [lm/W]: 85

PARAMETERS FOR DIRECTIONAL LIGHT SOURCES:

Peak luminous intensity [cd]: 628

Beam angle [°]: 110

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source

(kWh/1000h): 20

Energy efficiency class: F

Useful luminous flux of the light source Φ_{use} [lm]: 1620

Useful luminous flux of the light source Φ_{use} [lm]: in wide cone (120°)

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: 6

On-mode power of the light source P_{on} [W]: 20

Height of the light source [mm]: 106

Width of the light source [mm]: 117

Depth of the light source [mm]: 25

Colour rendering index: 70

Chromaticity coordinates (x): 0,38

Chromaticity coordinates (y): 0,38

R9 colour rendering index value: -35

Survival factor: 0,9

The lumen maintenance factor: 0,96

PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

Displacement factor ($\cos \phi_1$): 0,9

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

Flicker metric (P_{st} LM): 1.0

Stroboscopic effect metric (SVM): 0,4

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 40


Number of units in the packaging: 40

Net unit weight [g]: 210

31391 GRUN NV LED-20-B

LED floodlight

Grammage [g]: 255
Gross unit weight [g]: 240
Length of a unit pack [cm]: 12.5
Width of a unit pack [cm]: 3.5
Height of a unit pack [cm]: 11
Weight of a cardboard box [kg]: 10.2
Width of a cardboard box [cm]: 23
Height of a cardboard box [cm]: 27
Length of a cardboard box [cm]: 35
Volume of a cardboard box [m³]: 0.021735

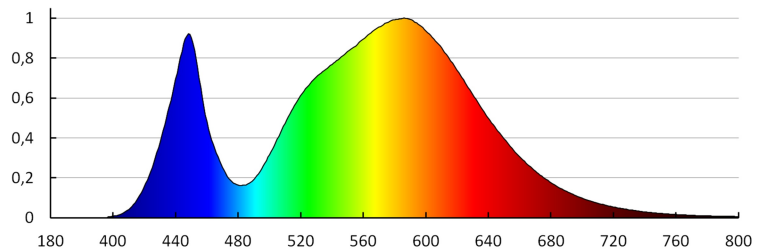

MILED0 (kat 31391) GRUN NV LED-20-B / LDC (Polar)

Luminaire: MILED0 (kat 31391) GRUN NV LED-20-B
Lamps: 1 x GRUN NV LED-20-B

