


# 31396 GRUN NV LED-200-B

LED floodlight

8595665313968

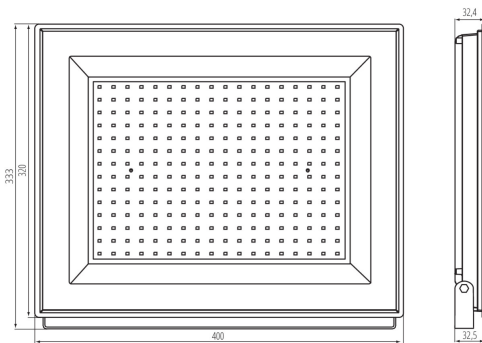

### TYPE OF LIGHT SOURCE:


Lighting technology used: LED  
 Non-directional or directional light source : DLS  
 Mains or non-mains light source : MLS  
 Connected light source (CLS): no  
 Colour-tuneable light source: no  
 High luminance light source: no  
 Anti-glare shield: no  
 Dimmable: no

### PRODUCT PARAMETERS:

Colour: black  
 Place of assembly: wall mounted, ceiling mounted, surface mounted  
 Place of application: for industrial applications  
 Minimum distance from the illuminated object : 0,5m  
 Compatible with a dimmer : no  
 Width [mm]: 400  
 Height [mm]: 333  
 Depth [mm]: 33  
 Rated voltage [V]: 220-240 AC  
 Rated frequency [Hz]: 50  
 Maximum power [W]: 200  
 Class of protection against electric shock : I  
 Lampshade material: Tempered glass  
 Diode type: LED SMD  
 Luminous flux [lm]: 19000  
 Colour temperature: white  
 Service life [h]: 25000  
 Number of on/off cycles : ≥30000  
 Lighting angle [°]: 110  
 Ambient temperature range to which the product can be exposed: -15÷35  
 Enclosure material: aluminum alloy  
 Wire length [m]: 0.15  
 Wire diameter [mm]: 1  
 Reflector type: symmetrical  
 Lamp-heating time [s]: ≤1  
 Lamp-ignition time [s]: ≤0,5  
 The fixture is movable vertically [°]: 130  
 IP class: 65  
 Additional information: Light source (LS)  
 Mercury content: no

## 31396 GRUN NV LED-200-B

## LED floodlight

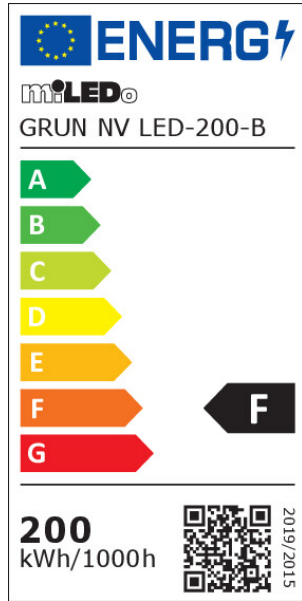

## PARAMETERS FOR DIRECTIONAL LIGHT SOURCES:

Peak luminous intensity [cd]: 6817

Beam angle [°]: 110

## PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source

(kWh/1000h): 200

Energy efficiency class: F

Useful luminous flux of the light source  $\Phi_{use}$  [lm]: 17500

Useful luminous flux of the light source  $\Phi_{use}$  [lm]: w szerokim stożku (120°)

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses:  $\leq 6$

On-mode power of the light source  $P_{on}$  [W]: 200

Height of the light source [mm]: 333

Width of the light source [mm]: 400

Depth of the light source [mm]: 33

Colour rendering index: 70

Chromaticity coordinates (x): 0,38

Chromaticity coordinates (y): 0,38

R9 colour rendering index value: -35

Survival factor: 0,9

The lumen maintenance factor: 0,96

## PARAMETERS FOR LED AND OLED

## MAINS LIGHT SOURCES:

Displacement factor ( $\cos \phi_1$ ): 0,9

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

Flicker metric (Pst LM): 1.0

Stroboscopic effect metric (SVM): 0,4

## LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 5

Number of units in the packaging: 5

Net unit weight [g]: 2662

Grammage [g]: 2960

Length of a unit pack [cm]: 40.5

Width of a unit pack [cm]: 3.5

Height of a unit pack [cm]: 34

Weight of a cardboard box [kg]: 14.8

Width of a cardboard box [cm]: 34.5


Height of a cardboard box [cm]: 20

Length of a cardboard box [cm]: 41

# 31396 GRUN NV LED-200-B

LED floodlight

Volume of a cardboard box [m<sup>3</sup>] : 0.02829

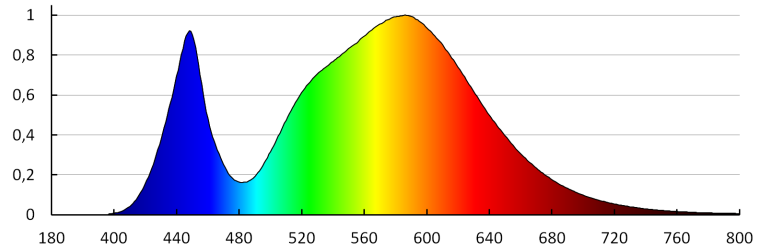

MILEDO (kat 31396) GRUN NV LED-200-B / LDC (Polar)

Luminaire: MILEDO (kat 31396) GRUN NV LED-200-B  
Lampe: 1 x GRUN NV LED-200-B

