

32597 KMB6-B32/4

Miniature circuit breaker, 4P

5905339325976



Circuit breaker with overcurrent protection is used to protect cables against overloads and short circuits in installations and devices.

PRODUCT PARAMETERS:

Rated voltage [V]: 400 AC

Rated frequency [Hz]: 50

Rated current [A]: 32

Place of assembly: na szynę TH35

IP class: 20

Norm: PN-EN 60898-1

Length [mm]: 76

Width [mm]: 70

Height [mm]: 82

Ambient temperature range to which the product can be exposed: -5÷40

Range of sections of wires used [mm²]: 1÷25

Terminal capacity – solid conductor [mm²]: max 25

Terminal capacity – stranded conductor [mm²]: max 16

Release characteristics: B

Energy-limit class: 3

Number of modules: 4


Rated short-circuit current [A]: 6000

Rated insulation voltage UI [V]: 500

Number of poles: 4

Mechanical endurance: 10000

Electrical endurance: 4000

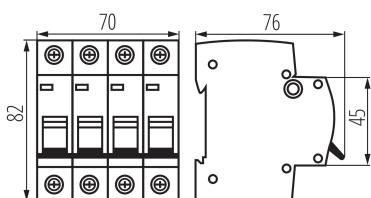

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 3

Number of units in the secondary packaging: 3

Number of units in the packaging: 30

Net unit weight [g]: 396

Grammage [g]: 426.67

Gross unit weight [g]: 410

Length of a unit pack [cm]: 7

Width of a unit pack [cm]: 7.5

32597 KMB6-B32/4

Miniature circuit breaker, 4P

| | |
|---|----------|
| Height of a unit pack [cm]: | 8.5 |
| Weight of a cardboard box [kg]: | 12.8001 |
| Width of a cardboard box [cm]: | 25 |
| Height of a cardboard box [cm]: | 19.5 |
| Length of a cardboard box [cm] : | 45 |
| Volume of a cardboard box [m³]: | 0.021938 |

Date of issue: 15.12.2025, 16:45

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com