


33080 REMI LED GU10-NW

LED light source

5905339330802



LED light sources Kanlux REMI LED are designed for small-size luminaires. Their illumination angle is 100°. The bulb is distinguished by its small size so it will be useful for neat, small lamps.

TYPE OF LIGHT SOURCE:

Lighting technology used: LED

Non-directional or directional light source: DLS

Mains or non-mains light source: MLS

Connected light source (CLS): no

Colour-tuneable light source: no

High luminance light source: no

Anti-glare shield: no

Dimmable: no

PRODUCT PARAMETERS:

Colour: white

Compatible with a dimmer: no

Width [mm]: 35

Height [mm]: 46

Depth [mm]: 35

Diameter [mm]: 35

Mercury content: no

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Lamp rated current [mA]: 20

Total rated luminous flux [lm]: 200

Rated beam angle [°]: 100

Material: plastic

Light source: PAR11

Diode type: LED SMD

Colour temperature: white

Cap: GU10

Rated lamp-service life [h]: 15000

Number of on/off cycles: ≥15000


Light source shape: spot

PARAMETERS FOR DIRECTIONAL LIGHT SOURCES:

Beam angle [°]: 100

33080 REMI LED GU10-NW

LED light source

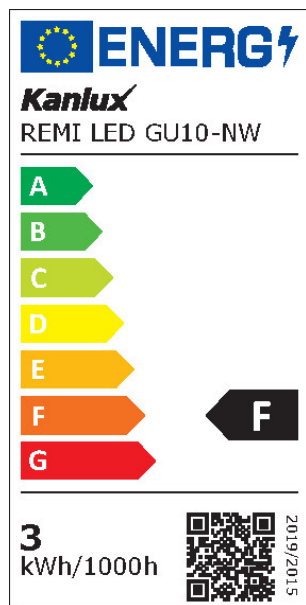

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source (kWh/1000h): 3
Energy efficiency class: F
Useful luminous flux of the light source Φ_{use} [lm]: 180
Useful luminous flux of the light source Φ_{use} [lm]: in wide cone (120°)
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: ≤ 6
On-mode power of the light source P_{on} [W]: 2.2
Height of the light source [mm]: 46
Width of the light source [mm]: 35
Depth of the light source [mm]: 35
Colour rendering index: 80
Chromaticity coordinates (x): 0.38
Chromaticity coordinates (y): 0.38
R9 colour rendering index value: 3
Survival factor: ≥ 0.9
The lumen maintenance factor: 0.93

PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:


Displacement factor ($\cos \phi_1$): 0.4
LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable
Flicker metric ($P_{st} LM$): $\leq 1,0$
Stroboscopic effect metric (SVM): $\leq 0,4$

LOGISTIC DATA:

Packaging method: 10
Number of units in the secondary packaging: 10
Number of units in the packaging: 100
Net unit weight [g]: 18
Grammage [g]: 36.6
Length of a unit pack [cm]: 8.5
Width of a unit pack [cm]: 5
Height of a unit pack [cm]: 10.5
Weight of a cardboard box [kg]: 3.66
Width of a cardboard box [cm]: 30
Height of a cardboard box [cm]: 24
Length of a cardboard box [cm]: 47
Volume of a cardboard box [m³]: 0.03384

33080 REMI LED GU10-NW

LED light source

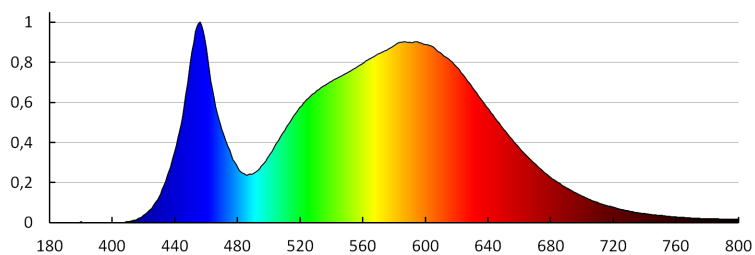

KANLUX S.A. (kat 33080) REMI LED GU10-NW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33080) REMI LED GU10-NW
Lamps: 1 x REMI LED GU10-NW

