Kanlux

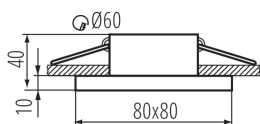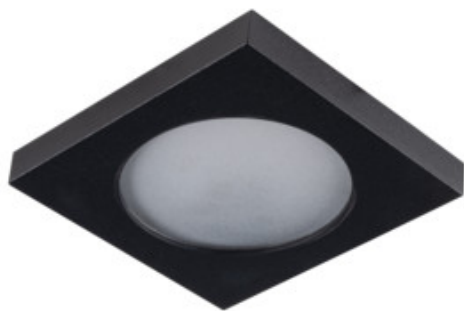ul. Objazdowa 1-3, 41-922 Radzionków, Poland

33120   FLINI IP44 DSL-B

Ring for spotlight fittings

5905339331205

IP 44/20

HIGH quality finish

Kanlux FLINI are ceiling luminaires dedicated for bathrooms and rooms with increased humidity. Thanks to their design, they are resistant to moisture (IP44). Kanlux FLINI are available in two shapes - round and square. You can choose between matt white or matt black. Two such universal colours will allow us to match these lamps to almost any interior. .

PRODUCT PARAMETERS:

Colour: black
Place of assembly: Recessed mount in the ceiling
Place of application: Indoors
Minimum distance from the illuminated object: 0,5m
Decorative ring without a ceramic frame: yes
The product is not suitable to be covered with a heat-insulating material: yes
Light source included: no
Length [mm]: 80
Width [mm]: 80
Height [mm]: 50
Assembly hole [mm]: Ø60
Rated voltage [V]: 12 AC; 12 DC; 220-240 AC
Maximum power [W]: max 10
Class of protection against electric shock: II/III
Light source: MR16/PAR16
Cap: Gx5,3/GU10
Enclosure material: aluminum alloy
Lighting-fixture angle regulation: none
IP class: 44/20

LOGISTIC DATA:

Packaging method: 50
Number of units in the secondary packaging: 1
Number of units in the packaging: 50
Net unit weight [g]: 110
Grammage [g]: 158
Length of a unit pack [cm]: 9
Width of a unit pack [cm]: 10
Height of a unit pack [cm]: 5.5
Weight of a cardboard box [kg]: 7.9
Width of a cardboard box [cm]: 23
Height of a cardboard box [cm]: 27.5
Length of a cardboard box [cm] : 47
Volume of a cardboard box [m³]: 0.029728

Ø60

40

10

80x80

Date of issue: 15.11.2022, 05:02
We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.

EN

33120   FLINI IP44 DSL-B

Ring for spotlight fittings

EN