

## 33136 ATL1 30W-940-S6-W

Track light projector

5905339331366



Kanlux ACORD ATL 1 are integrated lighting fixtures to be mounted on three-phase track. These are lamps that can be adapted to our individual needs. We can choose white or black, two powers (18W and 30W), light color and lighting angle (standard is 60°, but we can replace the reflector and change the angle to 15° or 36°) depending on whether we want to illuminate the surface or a specific detail. Kanlux ACORD ATL 1 stands for 50 000 hours of durability and a 5-year warranty. Branded key components (LED COB and power supply), high level of real color rendering (CRI> 90) and elimination of glare (UGR <19) are other advantages of these unique luminaires.

### PRODUCT PARAMETERS:

**Colour:** white

**Place of assembly:** rail TEAR

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Compatible with a dimmer:** no

**Integrated LED light source:** yes

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 30

**Class of protection against electric shock:** II

**Diode type:** LED COB

**Luminous flux [lm]:** 3000

**Colour temperature:** white

**Service life [h]:** 50000

**Number of on/off cycles:** ≥30000

**Lighting angle [°]:** 60

**Ambient temperature range to which the product can be exposed:** 5÷25

**Enclosure material:** aluminum alloy

**Protective glass material:** plastic

**Lamp-heating time [s]:** ≤1

**Lamp-ignition time [s]:** ≤0,5


**The fixture is movable horizontally [°]:** 315

**The fixture is movable vertically [°]:** 90

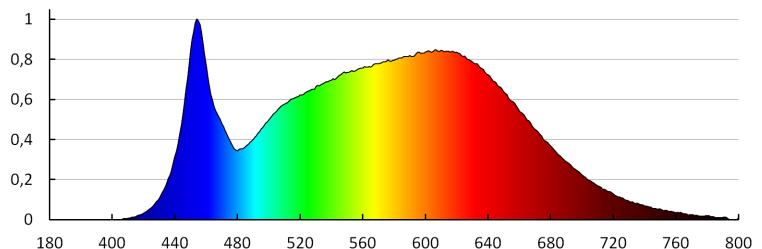
**IP class:** 20

**33136 ATL1 30W-940-S6-W**

Track light projector

**PARAMETERS FOR LED AND OLED LIGHT SOURCES:****Energy efficiency class:** E**Correlated colour temperature [K]:** 4000**Colour consistency in McAdam ellipses:**  $\leq 6$ **Colour rendering index:** 90**LOGISTIC DATA:****Packaging method:** 15**Number of units in the secondary packaging:** 1**Number of units in the packaging:** 15**Net unit weight [g]:** 790**Grammage [g]:** 946.67**Length of a unit pack [cm]:** 18**Width of a unit pack [cm]:** 9.5**Height of a unit pack [cm]:** 25.5**Weight of a cardboard box [kg]:** 14.20005**Width of a cardboard box [cm]:** 28**Height of a cardboard box [cm]:** 50**Length of a cardboard box [cm]:** 56.5**Volume of a cardboard box [m<sup>3</sup>]:** 0.0791**ADDITIONAL INFORMATION:**

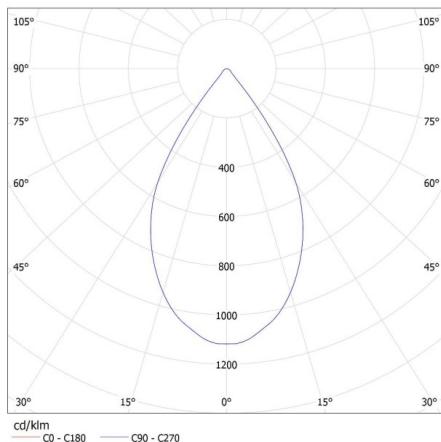
- 5 years Warranty under the terms of the warranty statement, available on our website
- for installation on the TEAR N busbar



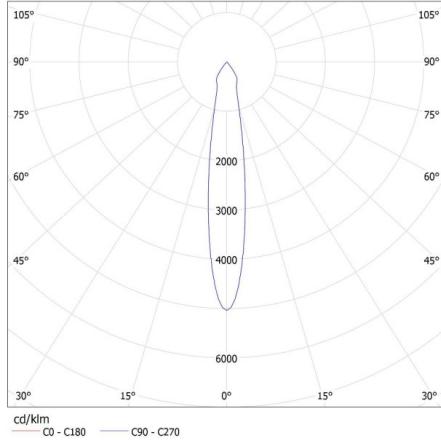
**33136 ATL1 30W-940-S6-W**

Track light projector

KANLUX S.A. (kat 33136) ATL1 30W-940-S6-W / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33136) ATL1 30W-940-S6-W  
Lamps: 1 x ATL1 30W-940-S6

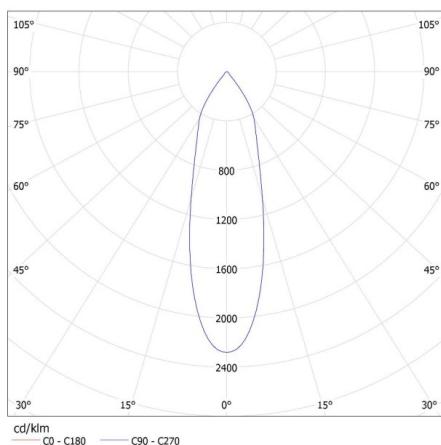
KANLUX S.A. (kat 33136+33142) ATL1 30W-940-S6-W + 33142 / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33136+33142) ATL1 30W-940-S6-W + 33142  
Lamps: 1 x ATL1 30W-940-S6

**33136 ATL1 30W-940-S6-W**

Track light projector

KANLUX S.A. (kat 33136+33143) ATL1 30W-940-S6-W + 33143 / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33136+33143) ATL1 30W-940-S6-W + 33143  
Lamps: 1 x ATL1 30W-940-S6**ACCESSORIES:****33140** REF ATL1-18W-S15 Reflector for the ATL 1 luminaire, 18 W, 15 degrees**33141** REF ATL1-18W-S36 Reflector for the ATL 1 luminaire, 18 W, 36 degrees**33142** REF ATL1-30W-S15 Reflector for the ATL 1 luminaire, 30 W, 15 degrees**33143** REF ATL1-30W-S36 Reflector for the ATL 1 luminaire, 30 W, 36 degrees