

33179 BLINGO TUN48W 6060 NW

Recessed-mounted LED panel

5905339331793



Kanlux BLINGO LED are backlight panels. They are equipped with a junction box with a quick connector, which allows for connecting panels with each other, and also speeds up their assembly. In the new models of the well-known Kanlux BLINGO LED panels, we have introduced an integrated power supply, thanks to which we can place them in the appropriate Kanlux ADTR frame and perform surface mounting of the panels.

PRODUCT PARAMETERS:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 48

Luminous flux of the light fitting [lm]: 6250

Luminous efficiency of the lamp [lm/W]: 130

Skuteczność świetlna [lm/W]: 130

Lighting angle [°]: 90

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses : ≤6

Colour temperature: white

Colour rendering index: 80

Service life [h]: 50000

Number of on/off cycles: ≥50000

Diode type: LED SMD

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object : 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating material: yes

Feeder included: yes

Length [mm]: 595

Width [mm]: 595

Height [mm]: 25

Integrated LED light source: yes

Class of protection against electric shock : I


Lampshade material: PS

Enclosure material: iron

Panel/frame material: iron

33179 BLINGO TUN48W 6060 NW

Recessed-mounted LED panel



Ambient temperature range to which the product can be exposed: 5÷25

Connection type: Self-clamping block

IP class: 20

Kształt: square

UGR: <19

Additional information: Possibility of replacing the LED light source only by qualified personnel (only by the manufacturer service)

Additional information: Possibility of replacing the control equipment only by qualified personnel (only by the manufacturer service)

Additional information: Containing product (CP)

Mercury content in the lamp [mg]: 0

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy efficiency class of the light source in the contains product (CP): D

Number of modules (LED light source): 1

Useful luminous flux of the light source Φ_{use} [lm]: 7620

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Chromaticity coordinates (x): 0,38

Chromaticity coordinates (y): 0,38

Lighting technology used: LED

Non-directional or directional light source: NDLS

Mains or non-mains light source: NMLS

Connected light source (CLS): no

Colour-tuneable light source: no

High luminance light source: no

Anti-glare shield: no

Dimmable: no

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 5

Number of units in the secondary packaging: 1

Number of units in the packaging: 5

Net unit weight [g]: 1790

Grammage [g]: 2266

Length of a unit pack [cm]: 60

Width of a unit pack [cm]: 3

33179 BLINGO TUN48W 6060 NW

Recessed-mounted LED panel

Height of a unit pack [cm]: 61.5

Weight of a cardboard box [kg]: 11.33

Width of a cardboard box [cm]: 17.5

Height of a cardboard box [cm]: 63


Length of a cardboard box [cm] : 61.5

Volume of a cardboard box [m³]: 0.067804

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

•

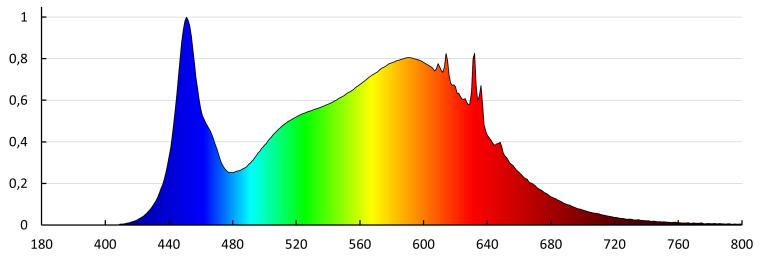

KANLUX S.A. (kat 33179) BLINGO TUN 48W 6060 NW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 33179) BLINGO TUN 48W 6060 NW
Lampy: 1 x BLINGO TUN 48W 6060 NW

