

33612 LOGI 02-1210-142 cm

Socket Outlet Without Earth - FireProof Plastic

5905339336125



A non-grounded single socket outlet allows you to power an electrical circuit with a maximum load of 16A.

PRODUCT PARAMETERS:

Colour: black matt

Place of assembly: Recessed mount in the wall

Width [mm]: 71

Height [mm]: 71

Diameter of an installation box: 60

Installation depth: 25

Number of sockets: 1

Rated voltage [V]: 250 AC

Rated current [A]: 16

Class of protection against electric shock: II

Material of contacts: CuZn70

Earthing type: 2P

Terminal type: Screw terminal

Plastic: ABS

IP class: 20

LOGISTIC DATA:

Packaging method: 10

Number of units in the secondary packaging: 10

Number of units in the packaging: 120

Net unit weight [g]: 58

Grammage [g]: 70.25

Length of a unit pack [cm]: 10

Width of a unit pack [cm]: 4

Height of a unit pack [cm]: 14


Weight of a cardboard box [kg]: 8.43

Width of a cardboard box [cm]: 25.5

Height of a cardboard box [cm]: 32

Length of a cardboard box [cm]: 44

Volume of a cardboard box [m³]: 0.035904

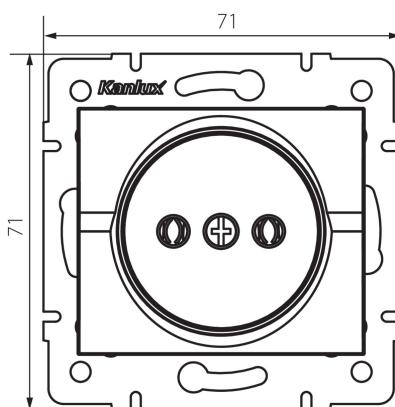



by **Kanlux**

ul. Objazdowa 1-3, 41-922 Radzionków, Poland

33612 LOGI 02-1210-142 cm

Socket Outlet Without Earth - FireProof Plastic

Date of issue: 15.11.2022, 22:00

We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.

EN