

# iQ-LED


## Kanlux

ul. Objazdowa 1-3, 41-922 Radzionków, Poland

### 33722 IQ-LEDDIM A60 7,3W-WW

LED light source

5905339337221

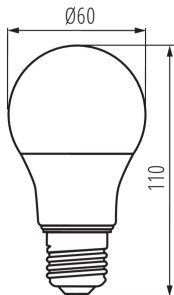

Kanlux IQ-LED means photo-biological safety, colour temperature friendly to eyes and reliability. Now, all this in a new version with E27 light bulb base - additionally, the IQ-LEDDIM version cooperates with dimmers. IQ-LED bulbs ensure full comfort of use and safety.

#### TYPE OF LIGHT SOURCE:

**Lighting technology used:** LED  
**Non-directional or directional light source :** NDLS  
**Mains or non-mains light source :** MLS  
**Connected light source (CLS):** no  
**Colour-tuneable light source:** no  
**High luminance light source:** no  
**Anti-glare shield:** no  
**Dimmable:** only with specific dimmers

#### PRODUCT PARAMETERS:

**Colour:** white  
**Lamp designed for dimming:** yes  
**Compatible with a dimmer:** yes  
**Width [mm]:** 60  
**Height [mm]:** 110  
**Depth [mm]:** 60  
**Diameter [mm]:** 60  
**Rated voltage [V]:** 220-240 AC  
**Rated frequency [Hz]:** 50  
**Lamp rated current [mA]:** 48  
**Rated power [W]:** 7.3  
**Total rated luminous flux [lm]:** 806  
**Rated beam angle [°]:** 220  
**Material:** plastic  
**Lampshade material:** plastic  
**Light source:** A60  
**Diode type:** LED SMD  
**Colour temperature:** Warm white  
**Cap:** E27  
**Rated lamp-service life [h]:** 25000

Date of issue: 02.02.2024, 16:58

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

EN


# iQ-LED

## Kanlux

ul. Objazdowa 1-3, 41-922 Radzionków, Poland

### 33722 IQ-LEDDIM A60 7,3W-WW

LED light source

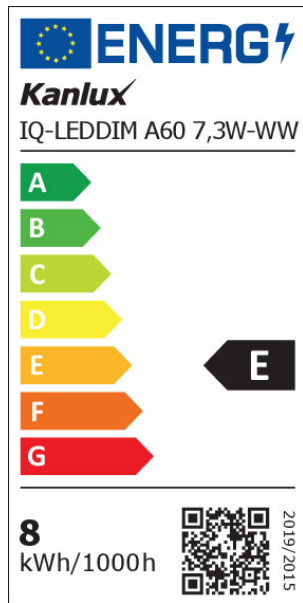

**Number of on/off cycles:**  $\geq 40000$

**Light source shape:** standard

**Additional information:** Light source (LS)

**Mercury content:** no

#### PARAMETERS FOR LED AND OLED LIGHT SOURCES:

**Energy consumption in on-mode of the light source (kWh/1000h):** 8

**Energy efficiency class:** E

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** 806

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** in sphere (360°)

**Correlated colour temperature [K]:** 2700

**Colour consistency in McAdam ellipses:**  $\leq 6$

**On-mode power of the light source  $P_{on}$  [W]:** 7.3

**Height of the light source [mm]:** 110

**Width of the light source [mm]:** 60

**Depth of the light source [mm]:** 60

**Colour rendering index:** 80

**Chromaticity coordinates (x):** 0.458

**Chromaticity coordinates (y):** 0.41

**Claim of equivalent power [W]:** 60

**R9 colour rendering index value:** 6

**Survival factor:**  $\geq 0.9$

**The lumen maintenance factor:** 0.96

#### PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

**Displacement factor (cos  $\phi_1$ ):** 0,9

**LED light source replaces a fluorescent light source without integrated ballast of a particular wattage:** Not applicable

**Flicker metric (Pst LM):** 1,0

**Stroboscopic effect metric (SVM):** 0.4

#### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 10

**Number of units in the secondary packaging:** 10

**Number of units in the packaging:** 50

**Net unit weight [g]:** 26

Date of issue: 02.02.2024, 16:58


We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

EN

**33722 IQ-LEDDIM A60 7,3W-WW**

LED light source

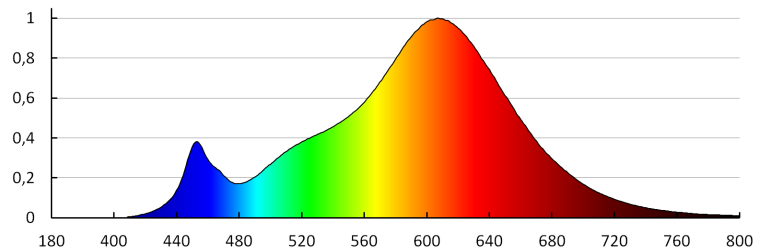**Grammage [g]: 62.2****Gross unit weight [g]: 44****Length of a unit pack [cm]: 6****Width of a unit pack [cm]: 6****Height of a unit pack [cm]: 11****Weight of a cardboard box [kg]: 3.11****Width of a cardboard box [cm]: 32****Height of a cardboard box [cm]: 13.5****Length of a cardboard box [cm]: 65****Volume of a cardboard box [m<sup>3</sup>]: 0.02808**

KANLUX S.A. (kat 33722) IQ-LEDDIM A60 7,3W-WW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33722) IQ-LEDDIM A60 7,3W-WW  
Lamps: 1 x IQ-LEDDIM A60 7,3W-WW