

iQ-LED


Kanlux

ul. Objazdowa 1-3, 41-922 Radzionków, Poland

33747 IQ-LED A67 N 19W-NW

LED light source

5905339337474



Kanlux IQ-LED means photo-biological safety, colour temperature friendly to eyes and reliability and all this in a new, large bulb A67. IQ-LED bulbs ensure full comfort of use and safety.

TYPE OF LIGHT SOURCE:

Lighting technology used: LED
Non-directional or directional light source: NDLS
Mains or non-mains light source: MLS
Connected light source (CLS): no
Colour-tuneable light source: no
High luminance light source: no
Anti-glare shield: no
Dimmable: no

PRODUCT PARAMETERS:

Colour: white
Compatible with a dimmer: no
Height [mm]: 143
Depth [mm]: 67
Diameter [mm]: 67
Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Lamp rated current [mA]: 150
Total rated luminous flux [lm]: 2452
Rated beam angle [°]: 200
Material: plastic
Lampshade material: plastic
Light source: A67
Diode type: LED SMD
Colour temperature: white
Cap: E27
Rated lamp-service life [h]: 15000
Number of on/off cycles: ≥40000
Light source shape: standard
Additional information: Light source (LS)
Mercury content: no

33747 IQ-LED A67 N 19W-NW

LED light source



PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source

(kWh/1000h): 19

Energy efficiency class: E

Useful luminous flux of the light source Φ_{use} [lm]: 2452

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: ≤ 6

On-mode power of the light source P_{on} [W]: 19

Height of the light source [mm]: 143

Width of the light source [mm]: 67

Depth of the light source [mm]: 67

Colour rendering index: 80

Chromaticity coordinates (x): 0.38

Chromaticity coordinates (y): 0.38

Claim of equivalent power [W]: 150

R9 colour rendering index value: 11

Survival factor: ≥ 0.9

The lumen maintenance factor: 0.93

PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

Displacement factor ($\cos \phi_1$): 0.7

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

Flicker metric (Pst LM): 1,0

Stroboscopic effect metric (SVM): 0.4

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 10

Number of units in the secondary packaging: 10

Number of units in the packaging: 50

Net unit weight [g]: 86

Grammage [g]: 137


Gross unit weight [g]: 108

Length of a unit pack [cm]: 6.5

Width of a unit pack [cm]: 6.5

33747 IQ-LED A67 N 19W-NW

LED light source

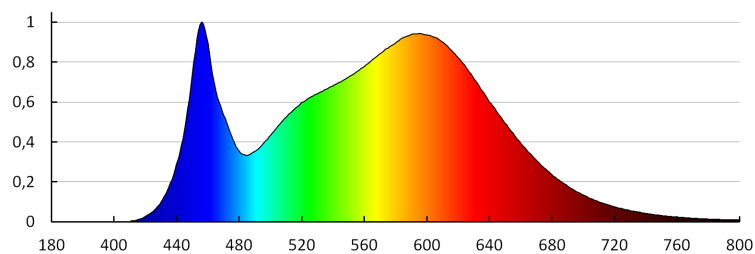Height of a unit pack [cm]: 14.5**Weight of a cardboard box [kg]: 6.85****Width of a cardboard box [cm]: 37****Height of a cardboard box [cm]: 18****Length of a cardboard box [cm] : 74.5****Volume of a cardboard box [m³]: 0.049617**

KANLUX S.A. (kat 33747) IQ-LED A67 N 19W-NW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33747) IQ-LED A67 N 19W-NW
Lampa: 1 x IQ-LED A67 N 19W-NW