


## 33847 ONTEC C M160NMATW

Emergency lighting LED

5902052536269

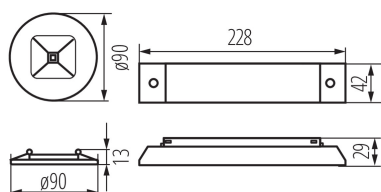

Emergency or anti-panic lighting is used in open space rooms to prevent panic. It allows you to reach a place where you can see the marked escape route as well as for the illumination of the escape route itself, depending on the prism used in the fixture.

### PRODUCT PARAMETERS:

**Colour:** white

**Place of assembly:** Recessed mount in the ceiling

**Place of application:** Indoors

**Height [mm]:** 13

**Diameter [mm]:** 90

**Integrated LED light source:** yes

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Rated power [W]:** 1.2

**Rated power (LED) [W]:** 3

**Class of protection against electric shock:** II

**Lampshade material:** plastic

**Diode type:** LED SMD

**Luminous flux [lm]:** 338

**Luminous flux [lm] (emergency-lighting module):** 338

**Colour temperature:** cold white

**Ambient temperature range to which the product can be exposed:** 10÷35

**Battery (type):** LiFePO4/C

**Battery (parameters):** 3,2V 1,5Ah

**Operating mode:** emergency

**Application:** anti-panic lighting

**Fail-safe working time [h]:** 1

**Automatic test:** yes

**Enclosure material:** plastic

**Connection type:** Self-clamping block

**IP class:** 20

### PARAMETERS FOR LED AND OLED LIGHT SOURCES:

**Correlated colour temperature [K]:** 5000

### LOGISTIC DATA:

**Packaging method:** 1

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 1

**Net unit weight [g]:** 264

**Grammage [g]:** 326

**Length of a unit pack [cm]:** 32.5

**Width of a unit pack [cm]:** 3.5

## **33847 ONTEC C M160NMATW**

---

Emergency lighting LED

**Height of a unit pack [cm]:** 9.5  
**Weight of a cardboard box [kg]:** 0.326  
**Width of a cardboard box [cm]:** 3.5  
**Height of a cardboard box [cm]:** 9.5  
**Length of a cardboard box [cm] :** 32.5  
**Volume of a cardboard box [m<sup>3</sup>]:** 0.001081