


33849 ONTEC C C160NMATW

Emergency lighting LED

5902052536504

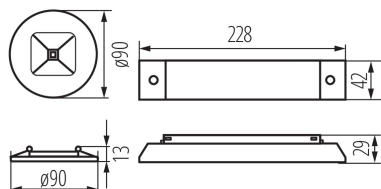

Emergency or anti-panic lighting is used in open space rooms to prevent panic. It allows you to reach a place where you can see the marked escape route as well as for the illumination of the escape route itself, depending on the prism used in the fixture.

PRODUCT PARAMETERS:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Height [mm]: 13

Diameter [mm]: 90

Integrated LED light source: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Rated power [W]: 1.2

Rated power (LED) [W]: 3

Class of protection against electric shock: II

Lampshade material: plastic

Diode type: LED SMD

Luminous flux [lm]: 297

Luminous flux [lm] (emergency-lighting module): 297

Colour temperature: cold white

Ambient temperature range to which the product can be exposed: 10÷35

Battery (type): LiFePO4/C

Battery (parameters): 3,2V 1,5Ah

Operating mode: emergency

Application: lighting of escape routes

Fail-safe working time [h]: 1

Automatic test: yes

Enclosure material: plastic

Connection type: Self-clamping block

IP class: 20

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Correlated colour temperature [K]: 5000

LOGISTIC DATA:

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 262

Grammage [g]: 324

Length of a unit pack [cm]: 33

Width of a unit pack [cm]: 3.5

33849 ONTEC C C160NMATW

Emergency lighting LED

Height of a unit pack [cm]: 9.5
Weight of a cardboard box [kg]: 0.324
Width of a cardboard box [cm]: 3.5
Height of a cardboard box [cm]: 9.5
Length of a cardboard box [cm] : 33
Volume of a cardboard box [m³]: 0.001097