


33858 ONTEC C M160NMSTW

Emergency lighting LED

5902052536207

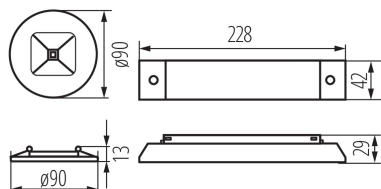

Emergency or anti-panic lighting is used in open space rooms to prevent panic. It allows you to reach a place where you can see the marked escape route as well as for the illumination of the escape route itself, depending on the prism used in the fixture.

PRODUCT PARAMETERS:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Height [mm]: 13

Diameter [mm]: 90

Integrated LED light source: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Rated power [W]: 1.2

Rated power (LED) [W]: 3

Class of protection against electric shock: II

Lampshade material: plastic

Diode type: LED SMD

Luminous flux [lm]: 338

Luminous flux [lm] (emergency-lighting module): 338

Colour temperature: cold white

Ambient temperature range to which the product can be exposed: 10÷35

Battery (type): LiFePO4/C

Battery (parameters): 3,2V 1,5Ah

Operating mode: emergency

Application: anti-panic lighting

Fail-safe working time [h]: 1

Standard test: yes

Enclosure material: plastic

Connection type: Self-clamping block

IP class: 20

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Correlated colour temperature [K]: 5000

LOGISTIC DATA:

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Kanlux ul. Objazdowa 1-3, 41-922 Radzionków, Poland

33858 ONTEC C M160NMSTW

Emergency lighting LED