



33985 AL-MH-NW-MAT-B-NT

Linear LED luminaire

5905339339850


**PRODUCT PARAMETERS:****Colour:** black**Place of assembly:** ceiling mounted**Place of application:** Indoors**Minimum distance from the illuminated object:** 0,5m**Compatible with a dimmer:** no**Fixture lighting direction:** down**Length [mm]:** 1140**Width [mm]:** 60**Height [mm]:** 69**Integrated LED light source:** yes**Version for connection in line [initial element] LF:** 34912 (NT)**Version for connection in line [central element] LM:** 34913 (NT)**Version for connection in line [final element] LL:** 34914 (NT)**Explanation of markings and signs used:** (NT) - do

nadbudowania na suficie

Rated voltage [V]: 220-240 AC**Rated frequency [Hz]:** 50**Maximum power [W]:** 40**Class of protection against electric shock:** I**Lampshade material:** plastic**Diode type:** LED SMD**Luminous flux [lm]:** 5050**Colour temperature:** white**Service life [h]:** 50000**Luminous-flux-retention factor at the end of rated service life:** L90B10**Number of on/off cycles:** ≥30000**Lighting angle [°]:** X85/Y95**Ambient temperature range to which the product can be exposed:** 5÷25**Shade type:** matt**Enclosure material:** aluminum alloy**Connection type:** Self-clamping block**Range of sections of wires used [mm²]:** 1,5÷2,5**Lamp-heating time [s]:** ≤1**Lamp-ignition time [s]:** ≤0,5**IP class:** 20**PARAMETERS FOR LED AND OLED LIGHT SOURCES:****Correlated colour temperature [K]:** 4000**Colour consistency in McAdam ellipses:** ≤3**Colour rendering index:** 80

33985 AL-MH-NW-MAT-B-NT

Linear LED luminaire

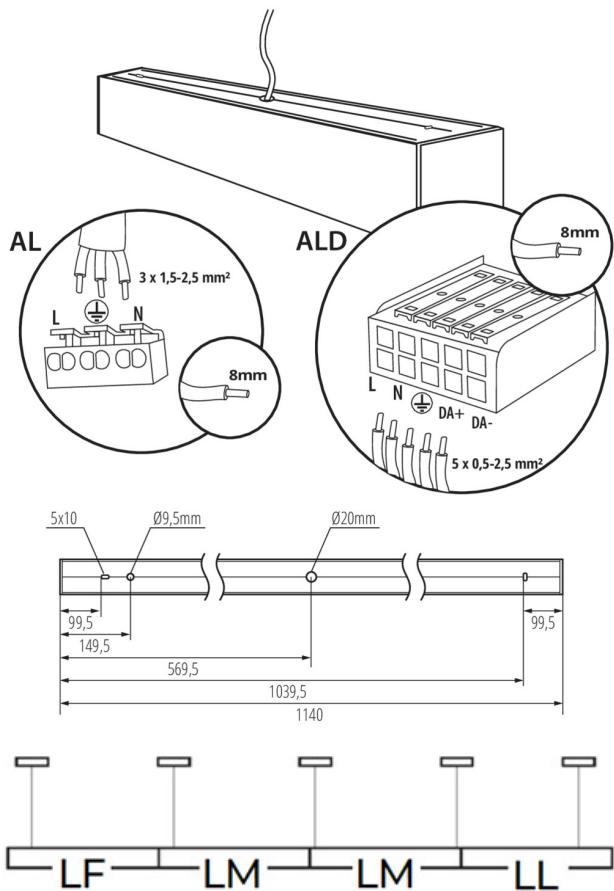
**LOGISTIC DATA:****Unit of measurement:** unit**Packaging method:** 1**Number of units in the secondary packaging :** 1**Number of units in the packaging :** 1**Net unit weight [g]:** 2100**Grammage [g]:** 2450**Length of a unit pack [cm]:** 136**Width of a unit pack [cm]:** 11**Height of a unit pack [cm]:** 7**Weight of a cardboard box [kg]:** 2.45**Width of a cardboard box [cm]:** 11**Height of a cardboard box [cm]:** 7**Length of a cardboard box [cm] :** 136**Volume of a cardboard box [m³]:** 0.010472**ADDITIONAL INFORMATION:**

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 33985) AL-MH-NW-MAT-B-NT / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33985) AL-MH-NW-MAT-B-NT

Lamps: 1 x AL-MH-NW-MAT

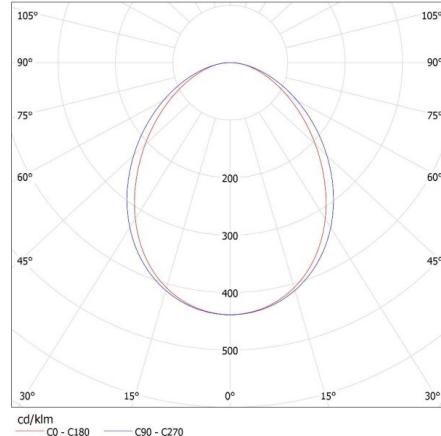

33985 AL-MH-NW-MAT-B-NT

Linear LED luminaire

ACCESSORIES**32540**

ALIN CORD 1F-W



Power supply terminal for ALIN luminaires and tracks, 1-phase, white, 150 cm

32541

ALIN CORD 1F-B



Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm

32542

ALIN CORD 1F-SR



Power supply terminal for ALIN luminaires and tracks, 1-phase, silver 150 cm

07871

ROPE-NT 150 SINGLE



ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set

29557

ALIN NT GRIP



Wall bracket for the ALIN luminaire, 2 pcs included

25979

KLOSSZ MPR AL 23W/33W



MPR shade for fitting ALIN, MPR SHADE AL 23W/33W, (25979)