

34058 AL-MM-NW-MPR-S-NT


Linear LED luminaire

5905339340580

**PRODUCT PARAMETERS:****Colour:** silver**Place of assembly:** ceiling mounted**Place of application:** Indoors**Minimum distance from the illuminated object :** 0,5m**Compatible with a dimmer:** no**Fixture lighting direction:** down**Length [mm]:** 1140**Width [mm]:** 60**Height [mm]:** 69**Integrated LED light source:** yes**Version for connection in line [initial element] LF :** 34544**Version for connection in line [central element] LM :** 34688**Version for connection in line [final element] LL :** 34832**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50**Maximum power [W]:** 29**Class of protection against electric shock :** I**Lampshade material:** plastic**Diode type:** LED SMD**Luminous flux [lm]:** 3600**Colour temperature:** white**Service life [h]:** 50000**Luminous-flux-retention factor at the end of rated service life :**
L90B10**Number of on/off cycles:** ≥30000**Lighting angle [°]:** X75/Y90**Ambient temperature range to which the product can be exposed:** 5÷25**Shade type:** microprismatic**Enclosure material:** aluminum alloy**Connection type:** Self-clamping block**Range of sections of wires used [mm²]:** 1,5÷2,5**Lamp-heating time [s]:** ≤1**Lamp-ignition time [s]:** ≤0,5**IP class:** 20**PARAMETERS FOR LED AND OLED LIGHT SOURCES:****Correlated colour temperature [K]:** 4000**Colour consistency in McAdam ellipses :** ≤3**Colour rendering index:** 80

34058 AL-MM-NW-MPR-S-NT

Linear LED luminaire

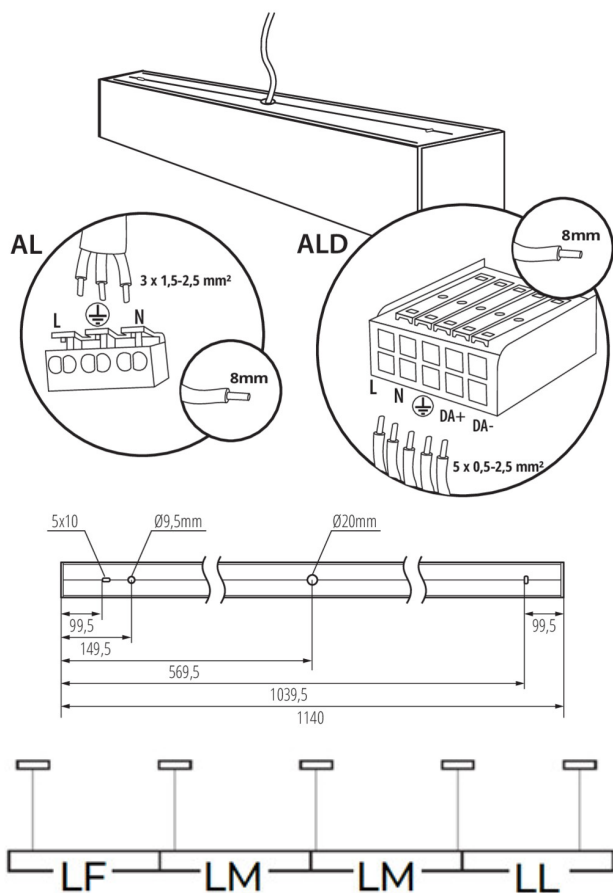

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 2050

Grammage [g]: 2400

Length of a unit pack [cm]: 136

Width of a unit pack [cm]: 11

Height of a unit pack [cm]: 7

Weight of a cardboard box [kg]: 2.4

Width of a cardboard box [cm]: 11

Height of a cardboard box [cm]: 7

Length of a cardboard box [cm]: 136


Volume of a cardboard box [m³]: 0.010472

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 34058) AL-MM-NW-MPR-S-NT / LDC (Polar)

Luminaire: KANLUX S.A. (kat 34058) AL-MM-NW-MPR-S-NT
Lamps: 1 x AL-MM-NW-MPR

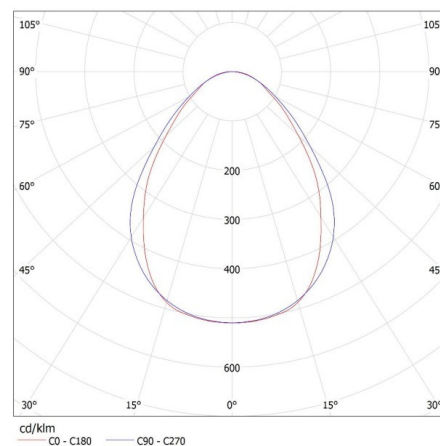

34058 AL-MM-NW-MPR-S-NT

Linear LED luminaire

ACCESSORIES

32540	ALIN CORD 1F-W	Power supply terminal for ALIN luminaires and tracks, 1-phase, white, 150 cm
		
32541	ALIN CORD 1F-B	Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm
		
32542	ALIN CORD 1F-SR	Power supply terminal for ALIN luminaires and tracks, 1-phase, silver 150 cm
		
07871	ROPE-NT 150 SINGLE	ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set
		
29557	ALIN NT GRIP	Wall bracket for the ALIN luminaire, 2 pcs included
		
25979	KLOSZ MPR AL 23W/33W	MPR shade for fitting ALIN, MPR SHADE AL 23W/33W, (25979)
		