

## 34106 AL-LL-WW-MAT-S-NT

Linear LED luminaire

5905339341068



### PRODUCT PARAMETERS:

**Colour:** silver

**Place of assembly:** ceiling mounted

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Compatible with a dimmer:** no

**Fixture lighting direction:** down

**Length [mm]:** 1700

**Width [mm]:** 60

**Height [mm]:** 69

**Integrated LED light source:** yes

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 33

**Class of protection against electric shock:** I

**Lampshade material:** plastic

**Diode type:** LED SMD

**Luminous flux [lm]:** 4100

**Colour temperature:** Warm white

**Service life [h]:** 50000

**Luminous-flux-retention factor at the end of rated service life:** L90B10

**Number of on/off cycles:**  $\geq 30000$

**Lighting angle [°]:** X85/Y95

**Ambient temperature range to which the product can be exposed:** 5÷25

**Shade type:** matt

**Enclosure material:** aluminum alloy

**Connection type:** Self-clamping block

**Range of sections of wires used [mm<sup>2</sup>]:** 1,5÷2,5

**Lamp-heating time [s]:**  $\leq 1$

**Lamp-ignition time [s]:**  $\leq 0,5$

**IP class:** 20

**Mercury content:** no

### PARAMETERS FOR LED AND OLED LIGHT SOURCES:

**Correlated colour temperature [K]:** 3000

**Colour consistency in McAdam ellipses:**  $\leq 3$

**Colour rendering index:** 80

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 1

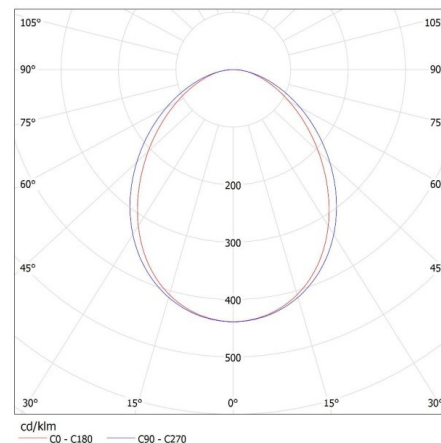
**34106 AL-LL-WW-MAT-S-NT**

## Linear LED luminaire

**Number of units in the secondary packaging :** 1**Number of units in the packaging :** 1**Net unit weight [g] :** 2920**Grammage [g] :** 3370**Length of a unit pack [cm] :** 182**Width of a unit pack [cm] :** 11**Height of a unit pack [cm] :** 7**Weight of a cardboard box [kg] :** 3.37**Width of a cardboard box [cm] :** 11**Height of a cardboard box [cm] :** 7**Length of a cardboard box [cm] :** 182**Volume of a cardboard box [m³] :** 0.014014**ADDITIONAL INFORMATION:**

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 34106) AL-LL-WW-MAT-S-NT / LDC (Polar)

Luminaire: KANLUX S.A. (kat 34106) AL-LL-WW-MAT-S-NT  
Lamps: 1 x AL-LL-WW-MAT

## 34106 AL-LL-WW-MAT-S-NT

Linear LED luminaire

### ACCESSORIES

|                                                                                     |                    |                                                                                 |
|-------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------|
| <b>32540</b>                                                                        | ALIN CORD 1F-W     | Power supply terminal for ALIN luminaires and tracks, 1-phase, white, 150 cm    |
|    |                    |                                                                                 |
| <b>32541</b>                                                                        | ALIN CORD 1F-B     | Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm    |
|    |                    |                                                                                 |
| <b>32542</b>                                                                        | ALIN CORD 1F-SR    | Power supply terminal for ALIN luminaires and tracks, 1-phase, silver 150 cm    |
|   |                    |                                                                                 |
| <b>07871</b>                                                                        | ROPE-NT 150 SINGLE | ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set |
|  |                    |                                                                                 |
| <b>29557</b>                                                                        | ALIN NT GRIP       | Wall bracket for the ALIN luminaire, 2 pcs included                             |
|  |                    |                                                                                 |