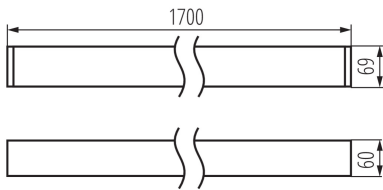



34110 AL-LL-WW-MPR-S-NT

Linear LED luminaire

5905339341105

**PRODUCT PARAMETERS:****Colour:** silver**Place of assembly:** ceiling mounted**Place of application:** Indoors**Minimum distance from the illuminated object :** 0,5m**Compatible with a dimmer:** no**Fixture lighting direction:** down**Length [mm]:** 1700**Width [mm]:** 60**Height [mm]:** 69**Integrated LED light source:** yes**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50**Maximum power [W]:** 33**Class of protection against electric shock :** I**Lampshade material:** plastic**Diode type:** LED SMD**Luminous flux [lm]:** 3750**Colour temperature:** Warm white**Service life [h]:** 50000**Luminous-flux-retention factor at the end of rated service life :**
L90B10**Number of on/off cycles:** ≥ 30000 **Lighting angle [°]:** X75/Y90**Ambient temperature range to which the product can be exposed:** 5÷25**Shade type:** microprismatic**Enclosure material:** aluminum alloy**Connection type:** Self-clamping block**Range of sections of wires used [mm²]:** 1,5÷2,5**Lamp-heating time [s]:** ≤ 1 **Lamp-ignition time [s]:** $\leq 0,5$ **IP class:** 20**Mercury content:** no**PARAMETERS FOR LED AND OLED LIGHT SOURCES:****Correlated colour temperature [K]:** 3000**Colour consistency in McAdam ellipses :** ≤ 3 **Colour rendering index:** 80**LOGISTIC DATA:****Unit of measurement:** unit**Packaging method:** 1

34110 AL-LL-WW-MPR-S-NT

Linear LED luminaire



Number of units in the secondary packaging : 1

Number of units in the packaging : 1

Net unit weight [g] : 2920

Grammage [g] : 3370

Length of a unit pack [cm] : 182

Width of a unit pack [cm] : 11

Height of a unit pack [cm] : 7

Weight of a cardboard box [kg] : 3.37

Width of a cardboard box [cm] : 11

Height of a cardboard box [cm] : 7

Length of a cardboard box [cm] : 182


Volume of a cardboard box [m³] : 0.014014

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 34110) AL-LL-WW-MPR-S-NT / LDC (Polar)

Luminaire: KANLUX S.A. (kat 34110) AL-LL-WW-MPR-S-NT
Lamps: 1 x AL-LL-WW-MPR

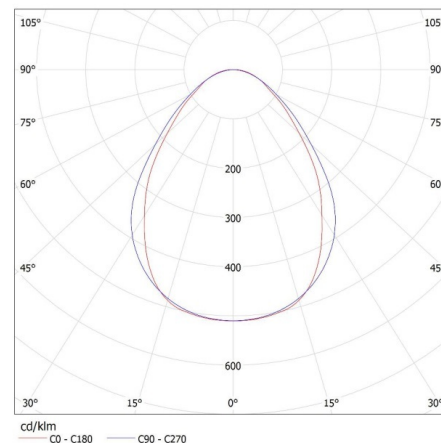

34110 AL-LL-WW-MPR-S-NT

Linear LED luminaire

ACCESSORIES

32540	ALIN CORD 1F-W	Power supply terminal for ALIN luminaires and tracks, 1-phase, white, 150 cm
		
32541	ALIN CORD 1F-B	Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm
		
32542	ALIN CORD 1F-SR	Power supply terminal for ALIN luminaires and tracks, 1-phase, silver 150 cm
		
07871	ROPE-NT 150 SINGLE	ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set
		
29557	ALIN NT GRIP	Wall bracket for the ALIN luminaire, 2 pcs included
		