




34166 ALD-SL-WW-MAT-B-NT


Linear LED luminaire

5905339341662

**PRODUCT PARAMETERS:****Colour:** black**Place of assembly:** ceiling mounted**Place of application:** Indoors**Minimum distance from the illuminated object :** 0,5m**Compatible with a dimmer:** DALI**Fixture lighting direction:** down**Length [mm]:** 580**Width [mm]:** 60**Height [mm]:** 69**Integrated LED light source :** yes**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50**Maximum power [W]:** 10**Class of protection against electric shock :** I**Lampshade material:** plastic**Diode type:** LED SMD**Luminous flux [lm]:** 1150**Colour temperature:** Warm white**Service life [h]:** 50000**Luminous-flux-retention factor at the end of rated service life :**
L90B10**Number of on/off cycles:** ≥ 30000 **Lighting angle [°]:** X85/Y95**Ambient temperature range to which the product can be exposed:** 5÷25**Shade type:** matt**Enclosure material:** aluminum alloy**Connection type:** Self-clamping block**Range of sections of wires used [mm²]:** 0,5÷2,5**Lamp-heating time [s]:** ≤ 1 **Lamp-ignition time [s]:** $\leq 0,5$ **IP class:** 20**PARAMETERS FOR LED AND OLED LIGHT SOURCES:****Correlated colour temperature [K]:** 3000**Colour consistency in McAdam ellipses :** ≤ 3 **Colour rendering index:** 80**LOGISTIC DATA:****Unit of measurement:** unit**Packaging method:** 1**Number of units in the secondary packaging :** 1

34166 ALD-SL-WW-MAT-B-NT

Linear LED luminaire

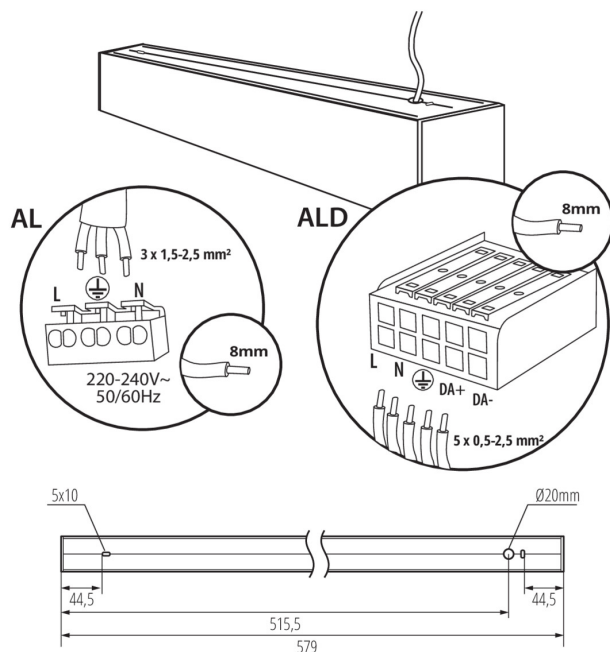**Number of units in the packaging:** 1**Net unit weight [g]:** 1300**Grammage [g]:** 1377**Length of a unit pack [cm]:** 75**Width of a unit pack [cm]:** 11**Height of a unit pack [cm]:** 7**Weight of a cardboard box [kg]:** 1.377**Width of a cardboard box [cm]:** 11**Height of a cardboard box [cm]:** 7**Length of a cardboard box [cm]:** 75**Volume of a cardboard box [m³]:** 0.005775**ADDITIONAL INFORMATION:**

- 5 years Warranty under the terms of the warranty statement, available on our website

34166 ALD-SL-WW-MAT-B-NT

Linear LED luminaire

ACCESSORIES

32543	ALIN CORD DALI 1F-W	Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, white, 150 cm
		
32544	ALIN CORD DALI 1F-B	Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, black, 150 cm
		
32545	ALIN CORD DALI 1F-SR	Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, silver, 150 cm
		
07871	ROPE-NT 150 SINGLE	ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set
		
29557	ALIN NT GRIP	Wall bracket for the ALIN luminaire, 2 pcs included
		
27109	KLOSZ MPR AL 11W/17W	MPR shade for fitting ALIN, MPR SHADE AL 11W/17W, (27109)
		