


## 34242 ALD-ML-WW-MPR-B-NT

Linear LED luminaire

5905339342423



**DALI**  
system

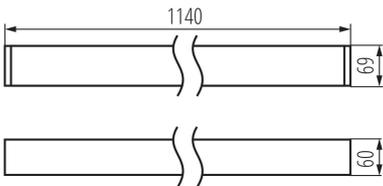

### PRODUCT PARAMETERS:

**Colour:** black

**Place of assembly:** ceiling mounted

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Compatible with a dimmer:** DALI

**Fixture lighting direction:** down

**Length [mm]:** 1140

**Width [mm]:** 60

**Height [mm]:** 69

**Integrated LED light source:** yes

**Version for connection in line [initial element] LF:** 34561

**Version for connection in line [central element] LM:** 34705

**Version for connection in line [final element] LL:** 34849

**Explanation of markings and signs used:** (NT) - do nadbudowania na suficie, (Z) - do zawieszenia na suficie

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 25

**Class of protection against electric shock:** I

**Lampshade material:** plastic

**Diode type:** LED SMD

**Luminous flux [lm]:** 2750

**Colour temperature:** Warm white

**Service life [h]:** 50000

**Luminous-flux-retention factor at the end of rated service life:** L90B10

**Number of on/off cycles:**  $\geq 30000$

**Lighting angle [°]:** X75/Y90

**Ambient temperature range to which the product can be exposed:** 5÷25

**Shade type:** microprismatic

**Enclosure material:** aluminum alloy

**Connection type:** Self-clamping block

**Range of sections of wires used [mm<sup>2</sup>]:** 0,5÷2,5

**Lamp-heating time [s]:**  $\leq 1$

**Lamp-ignition time [s]:**  $\leq 0,5$

**IP class:** 20

### PARAMETERS FOR LED AND OLED LIGHT SOURCES:




**Correlated colour temperature [K]:** 3000

**Colour consistency in McAdam ellipses:**  $\leq 3$

**Colour rendering index:** 80

## 34242 ALD-ML-WW-MPR-B-NT

Linear LED luminaire

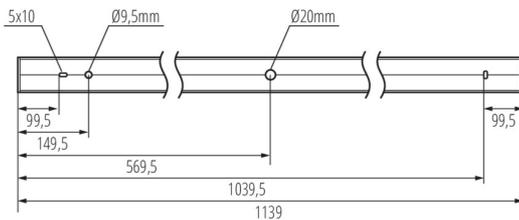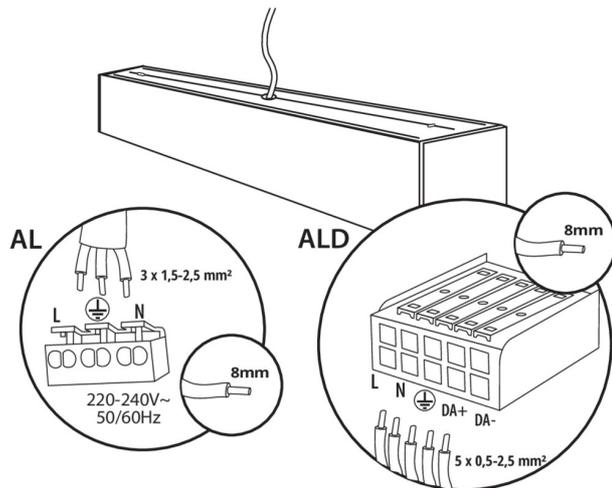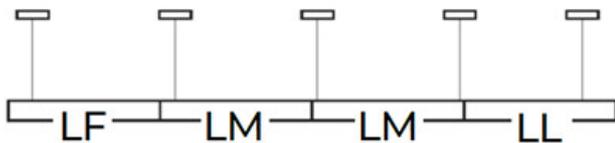

### LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 2135

Grammage [g]: 2485

Length of a unit pack [cm]: 136

Width of a unit pack [cm]: 11

Height of a unit pack [cm]: 7

Weight of a cardboard box [kg]: 2.485

Width of a cardboard box [cm]: 11

Height of a cardboard box [cm]: 7

Length of a cardboard box [cm]: 136

Volume of a cardboard box [m³]: 0.010472

### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

## 34242 ALD-ML-WW-MPR-B-NT

Linear LED luminaire

### ACCESSORIES

<b>32543</b>	ALIN CORD DALI 1F-W	Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, white, 150 cm
		
<b>32544</b>	ALIN CORD DALI 1F-B	Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, black, 150 cm
		
<b>32545</b>	ALIN CORD DALI 1F-SR	Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, silver, 150 cm
		
<b>07871</b>	ROPE-NT 150 SINGLE	ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set
		
<b>29557</b>	ALIN NT GRIP	Wall bracket for the ALIN luminaire, 2 pcs included
		
<b>25979</b>	KLOSZ MPR AL 23W/33W	MPR shade for fitting ALIN, MPR SHADE AL 23W/33W, (25979)
		