



34254 ALD-ML-WW-MPR-S-NT


Linear LED luminaire

5905339342546

**PRODUCT PARAMETERS:****Colour:** silver**Place of assembly:** ceiling mounted**Place of application:** Indoors**Minimum distance from the illuminated object :** 0,5m**Compatible with a dimmer:** DALI**Fixture lighting direction:** down**Length [mm]:** 1140**Width [mm]:** 60**Height [mm]:** 69**Integrated LED light source :** yes**Version for connection in line [initial element] LF :** 34562**Version for connection in line [central element] LM :** 34706**Version for connection in line [final element] LL :** 34850**Explanation of markings and signs used :** (NT) - do nadbudowania na suficie, (Z) - do zawieszenia na suficie**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50**Maximum power [W]:** 25**Class of protection against electric shock :** I**Lampshade material:** plastic**Diode type:** LED SMD**Luminous flux [lm]:** 2750**Colour temperature:** Warm white**Service life [h]:** 50000**Luminous-flux-retention factor at the end of rated service life :** L90B10**Number of on/off cycles :** ≥ 30000 **Lighting angle [°]:** X75/Y90**Ambient temperature range to which the product can be exposed:** 5÷25**Shade type:** microprismatic**Enclosure material:** aluminum alloy**Connection type:** Self-clamping block**Range of sections of wires used [mm²]:** 0,5÷2,5**Lamp-heating time [s]:** ≤ 1 **Lamp-ignition time [s]:** $\leq 0,5$ **IP class:** 20**PARAMETERS FOR LED AND OLED LIGHT SOURCES:****Correlated colour temperature [K]:** 3000**Colour consistency in McAdam ellipses :** ≤ 3 **Colour rendering index:** 80

34254 ALD-ML-WW-MPR-S-NT

Linear LED luminaire

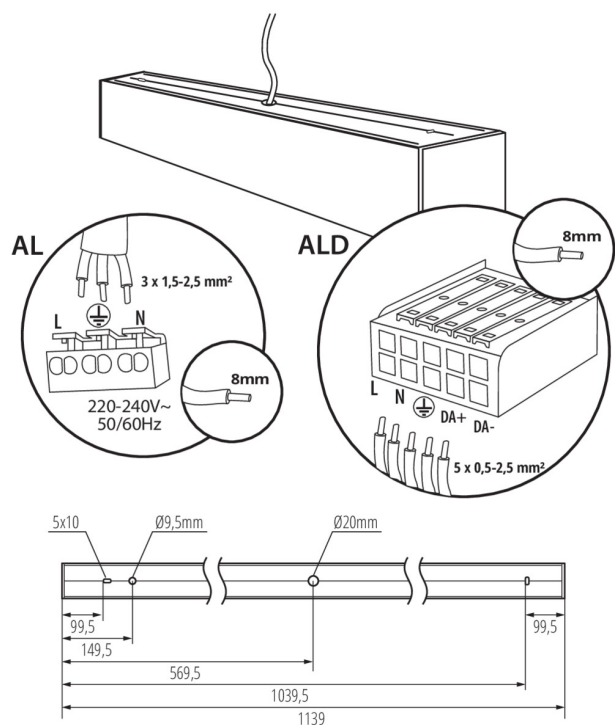

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 2135

Grammage [g]: 2485

Length of a unit pack [cm]: 136

Width of a unit pack [cm]: 11

Height of a unit pack [cm]: 7

Weight of a cardboard box [kg]: 2.485

Width of a cardboard box [cm]: 11

Height of a cardboard box [cm]: 7

Length of a cardboard box [cm]: 136

Volume of a cardboard box [m³]: 0.010472

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

34254 ALD-ML-WW-MPR-S-NT

Linear LED luminaire

ACCESSORIES

32543	ALIN CORD DALI 1F-W	Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, white, 150 cm
		
32544	ALIN CORD DALI 1F-B	Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, black, 150 cm
		
32545	ALIN CORD DALI 1F-SR	Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, silver, 150 cm
		
07871	ROPE-NT 150 SINGLE	ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set
		
29557	ALIN NT GRIP	Wall bracket for the ALIN luminaire, 2 pcs included
		
25979	KLOSZ MPR AL 23W/33W	MPR shade for fitting ALIN, MPR SHADE AL 23W/33W, (25979)
		