

34398 ALD-LL-WW-MPR-S-PT


Linear LED luminaire

5905339343987



PRODUCT PARAMETERS:

Colour: silver
Place of assembly: Recessed mount in the ceiling
Place of application: Indoors
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: DALI
Fixture lighting direction: down
Length [mm]: 1710
Width [mm]: 83
Height [mm]: 65
Integrated LED light source: yes
Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 33
Class of protection against electric shock: I
Lampshade material: plastic
Diode type: LED SMD
Luminous flux [lm]: 3750
Colour temperature: Warm white
Service life [h]: 50000
Luminous-flux-retention factor at the end of rated service life: L90B10
Number of on/off cycles: ≥ 30000
Lighting angle [°]: X75/Y90
Ambient temperature range to which the product can be exposed: 5÷25
Shade type: microprismatic
Enclosure material: steel
Connection type: Self-clamping block
Range of sections of wires used [mm²]: 0,5÷2,5
Lamp-heating time [s]: ≤ 1
Lamp-ignition time [s]: $\leq 0,5$
IP class: 20

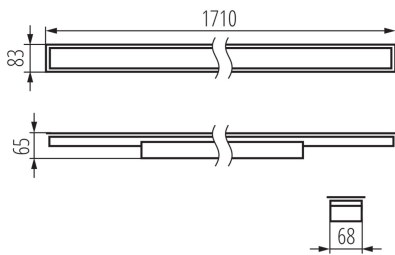

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Correlated colour temperature [K]: 3000
Colour consistency in McAdam ellipses: ≤ 3
Colour rendering index: 80

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 1
Number of units in the secondary packaging: 1

34398 ALD-LL-WW-MPR-S-PT

Linear LED luminaire

Number of units in the packaging: 1

Net unit weight [g]: 2400

Grammage [g]: 2840

Length of a unit pack [cm]: 182

Width of a unit pack [cm]: 11

Height of a unit pack [cm]: 7

Weight of a cardboard box [kg]: 2.84

Width of a cardboard box [cm]: 11

Height of a cardboard box [cm]: 7

Length of a cardboard box [cm]: 182

Volume of a cardboard box [m³]: 0.014014

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website