


34933 ASTIM IP44 12W-NW-B

Linear LED furniture light

5905339349330

IP
44

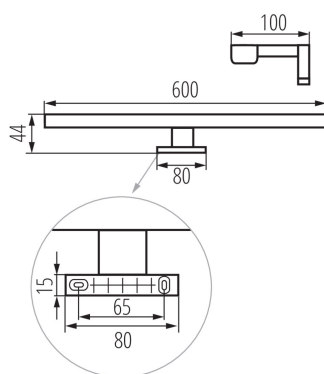

Kanlux ASTIM is a bathroom luminaire with increased tightness (IP44). These luminaires are mounted to a mirror frame or cabinet. With three versatile colours, you can match them to bathrooms with traditional or modern decor.

TYPE OF LIGHT SOURCE:

Lighting technology used: LED

Non-directional or directional light source: NDLS

Mains or non-mains light source: NMLS

Connected light source (CLS): no

Colour-tuneable light source: no

High luminance light source: no

Anti-glare shield: no

Dimmable: no

PRODUCT PARAMETERS:

Colour: black

Place of assembly: surface mounted

Place of application: Indoors

Minimum distance from the illuminated object: 0,1m

Compatible with a dimmer: no

Fixture lighting direction: down

Length [mm]: 600

Width [mm]: 100

Height [mm]: 44

Mercury content: no

Integrated LED light source: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 12

Class of protection against electric shock: II

Lampshade material: plastic

Diode type: LED SMD

LED module: W600C40-66V-66-2835-SS

Luminous flux [lm]: 910

Colour temperature: white

Service life [h]: 25000

Number of on/off cycles: ≥ 15000

Lighting angle [°]: X120/Y105

Ambient temperature range to which the product can be exposed: $5 \div 30$

Enclosure material: aluminum alloy

Connection type: Bolt terminal block

Range of sections of wires used [mm²]: $0,75 \div 1,5$

Lamp-heating time [s]: ≤ 1

34933 ASTIM IP44 12W-NW-B

Linear LED furniture light

Lamp-ignition time [s]: ≤0,5**IP class:** 44**Additional information:** It is not possible to replace the LED light source**Additional information:** It is not possible to replace the control panel or control equipment**PARAMETERS FOR LED AND OLED LIGHT SOURCES:****Energy consumption in on-mode of the light source (kWh/1000h):** 12**Useful luminous flux of the light source Φ_{use} [lm]:** 1450**Correlated colour temperature [K]:** 4000**Colour consistency in McAdam ellipses:** ≤6**On-mode power of the light source P_{on} [W]:** 11.2**Height of the light source [mm]:** 20**Width of the light source [mm]:** 595**Depth of the light source [mm]:** 1**Colour rendering index:** 80**Chromaticity coordinates (x):** 0,38**Chromaticity coordinates (y):** 0,38**Survival factor:** 0,9**The lumen maintenance factor:** 0,96**PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:****LED light source replaces a fluorescent light source without integrated ballast of a particular wattage:** Not applicable**LOGISTIC DATA:****Packaging method:** 20**Number of units in the secondary packaging:** 1**Number of units in the packaging:** 20**Net unit weight [g]:** 234**Grammage [g]:** 424.5**Length of a unit pack [cm]:** 13**Width of a unit pack [cm]:** 5**Height of a unit pack [cm]:** 61.5**Weight of a cardboard box [kg]:** 8.49**Width of a cardboard box [cm]:** 53**Height of a cardboard box [cm]:** 27.5**Length of a cardboard box [cm]:** 63**Volume of a cardboard box [m³]:** 0.091823

34933 ASTIM IP44 12W-NW-B

Linear LED furniture light

KANLUX S.A. (kat 34933) ASTIM IP44 12W-NW-B / LDC (Polar)

Luminaire: KANLUX S.A. (kat 34933) ASTIM IP44 12W-NW-B
Lamps: 1 x ASTIM IP44 12W-NW

