

## 35000 STIVI LED 24W-NW-O

Ceiling-mounted LED light fitting

5905339350008



The Kanlux STIVI LED ceiling light will provide you with lighting where standard luminaires may fail. It is characterised by high luminous efficacy of 130lm/W, a high level of protection - IP65 and impact protection rating of IK08. Kanlux STIVI LED luminaire can be used outdoors (on balconies, terraces, patios, open arbours), in corridors and staircases, as well as in places with increased humidity (laundry rooms, changing rooms and passageways at swimming pools). Additional advantages include: 5-year warranty and 50,000 hours of light source life in the luminaire, as well as the option of choosing a version with a motion sensor. We recommend it as a high-end investment product or for professional domestic use.

### TYPE OF LIGHT SOURCE:

**Lighting technology used:** LED

**Non-directional or directional light source:** NDLS

**Connected light source (CLS):** no

**Dimmable:** no

### PRODUCT PARAMETERS:

**Colour:** white

**Place of assembly:** wall mounted, ceiling mounted

**Place of application:** Indoors and outdoors

**Minimum distance from the illuminated object:** 0,5m

**Possibility of fixture-loop-through connection:** yes

**Compatible with a dimmer:** no

**Height [mm]:** 54

**Diameter [mm]:** 280

**Mercury content:** no

**Integrated LED light source:** yes

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 24

**Class of protection against electric shock:** II

**Lampshade material:** PC

**Diode type:** LED SMD

**Luminous flux of the light fitting [lm]:** 3120

**Colour temperature:** white

**Service life [h]:** 50000

**Number of on/off cycles:** ≥30000


**Lighting angle [°]:** 110

**Ambient temperature range to which the product can be exposed:** -20÷40

**Enclosure material:** PC

## 35000 STIVI LED 24W-NW-O

Ceiling-mounted LED light fitting



**Connection type:** Self-clamping block

**Range of sections of wires used [mm<sup>2</sup>]:** 0,5-2,5

**Lamp-heating time [s]:** ≤1

**Lamp-ignition time [s]:** ≤0,5

**IK class:** 08

**IP class:** 65

**Additional information:** It is not possible to replace the LED light source

**Additional information:** It is not possible to replace the control panel or control equipment

### PARAMETERS FOR LED AND OLED LIGHT SOURCES:

**Energy efficiency class:** C

**Useful luminous flux of the light source Φuse [lm]:** 4000

**Useful luminous flux of the light source Φuse [lm]:** in sphere (360°)

**Correlated colour temperature [K]:** 4000

**Colour consistency in McAdam ellipses:** ≤6

**Colour rendering index:** 80

### LOGISTIC DATA:

**Packaging method:** 8

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 8

**Net unit weight [g]:** 722

**Grammage [g]:** 868.75

**Length of a unit pack [cm]:** 29

**Width of a unit pack [cm]:** 6

**Height of a unit pack [cm]:** 29

**Weight of a cardboard box [kg]:** 6.95

**Width of a cardboard box [cm]:** 30.5


**Height of a cardboard box [cm]:** 32

**Length of a cardboard box [cm]:** 54

**Volume of a cardboard box [m<sup>3</sup>]:** 0.052704

### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

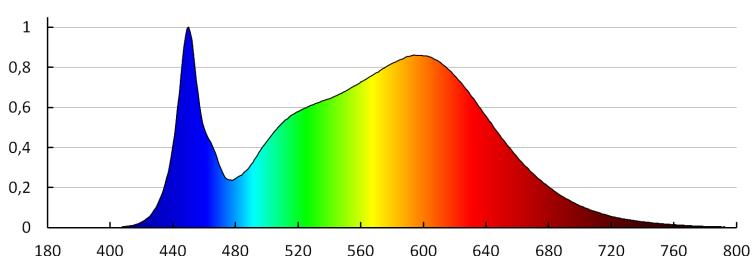

**35000 STIVI LED 24W-NW-O**

Ceiling-mounted LED light fitting

