

35001 STIVI LED 24W-NW-O-SE

Ceiling-mounted LED light fitting

5905339350015



The Kanlux STIVI LED ceiling light will provide you with lighting where standard luminaires may fail. It is characterised by high luminous efficacy of 130lm/W, a high level of protection - IP65 and impact protection rating of IK08. Kanlux STIVI LED luminaire can be used outdoors (on balconies, terraces, patios, open arbours), in corridors and staircases, as well as in places with increased humidity (laundry rooms, changing rooms and passageways at swimming pools). Additional advantages include: 5-year warranty and 50,000 hours of light source life in the luminaire, as well as the option of choosing a version with a motion sensor. We recommend it as a high-end investment product or for professional domestic use.

TYPE OF LIGHT SOURCE:

Lighting technology used: LED

Non-directional or directional light source: NDLS

Connected light source (CLS): no

Dimmable: no

PRODUCT PARAMETERS:

Colour: white

Place of assembly: wall mounted, ceiling mounted

Place of application: Indoors and outdoors

Micro-interval between relay contacts: yes

Minimum distance from the illuminated object: 0,5m

Possibility of fixture-loop-through connection: yes

Compatible with a dimmer: no

Wykrywanie ruchu: yes

Height [mm]: 54

Diameter [mm]: 280

Sensitivity regulation: yes

Mercury content: no

Integrated LED light source: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 24

Class of protection against electric shock: II

Lampshade material: PC

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 3120

Colour temperature: white

Service life [h]: 50000


Number of on/off cycles: ≥30000

Lighting angle [°]: 110



35001 STIVI LED 24W-NW-O-SE

Ceiling-mounted LED light fitting


**Ambient temperature range to which the product can be exposed:** -20÷40**Enclosure material:** PC**Sensor type:** microwave**Connection type:** Self-clamping block**Range of sections of wires used [mm²]:** 0,5-2,5**Sensor-operation time [second-minute]:** 5-15**Lamp-heating time [s]:** ≤1**Lamp-ignition time [s]:** ≤0,5**Sensor-operation frequency [MHz]:** 5800**sensor working angle [°]:** H360**Illumination-level setpoint by which the sensor detects movement [lx]:** 2/10/50/off**IK class:** 08**IP class:** 65**Sensor range[m]:** max 3**Additional information:** It is not possible to replace the LED light source**Additional information:** It is not possible to replace the control panel or control equipment**PARAMETERS FOR LED AND OLED LIGHT SOURCES:****Energy efficiency class:** C**Useful luminous flux of the light source Φ_{use} [lm]:** 4000**Useful luminous flux of the light source Φ_{use} [lm]:** in sphere (360°)**Correlated colour temperature [K]:** 4000**Colour consistency in McAdam ellipses:** ≤6**Colour rendering index:** 80**LOGISTIC DATA:****Packaging method:** 8**Number of units in the secondary packaging:** 1**Number of units in the packaging:** 8**Net unit weight [g]:** 800**Grammage [g]:** 941.25**Length of a unit pack [cm]:** 29**Width of a unit pack [cm]:** 6**Height of a unit pack [cm]:** 29**Weight of a cardboard box [kg]:** 7.53**Width of a cardboard box [cm]:** 30.5**Height of a cardboard box [cm]:** 32**Length of a cardboard box [cm]:** 54**Volume of a cardboard box [m³]:** 0.052704

35001 STIVI LED 24W-NW-O-SE

Ceiling-mounted LED light fitting

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

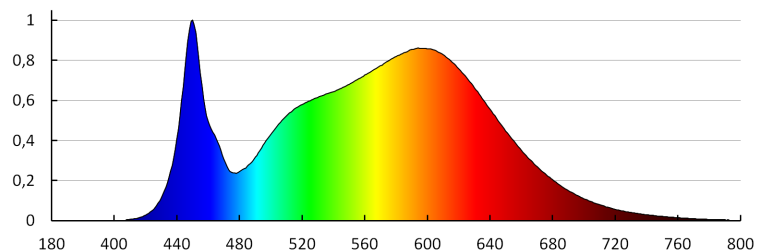

KANLUX S.A. (kat 35001) STIVI LED 24W-NW-O-SE / LDC (Polar)

Luminaire: KANLUX S.A. (kat 35001) STIVI LED 24W-NW-O-SE
Lamps: 1 x STIVI LED 24W-NW-O

