

## 35006 STIVI LED 15W-NW-O

Ceiling-mounted LED light fitting

5905339350060



The Kanlux STIVI LED ceiling light will provide you with lighting where standard luminaires may fail. It is characterised by high luminous efficacy of 130lm/W, a high level of protection - IP65 and impact protection rating of IK08. Kanlux STIVI LED luminaire can be used outdoors (on balconies, terraces, patios, open arbours), in corridors and staircases, as well as in places with increased humidity (laundry rooms, changing rooms and passageways at swimming pools). Additional advantages include: 5-year warranty and 50,000 hours of light source life in the luminaire, as well as the option of choosing a version with a motion sensor. We recommend it as a high-end investment product or for professional domestic use.

### TYPE OF LIGHT SOURCE:

**Lighting technology used:** LED

**Non-directional or directional light source :** NDLS

**Mains or non-mains light source :** NMLS

**Connected light source (CLS) :** no

**Colour-tunable light source:** no

**High luminance light source:** no

**Anti-glare shield:** no

**Dimmable:** no

### PRODUCT PARAMETERS:

**Colour:** white

**Place of assembly:** wall mounted, ceiling mounted

**Place of application:** Indoors and outdoors

**Minimum distance from the illuminated object :** 0,5m

**Possibility of fixture-loop-through connection:** yes

**Compatible with a dimmer:** no

**Height [mm]:** 62

**Diameter [mm]:** 220

**Integrated LED light source:** yes

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 15


**Class of protection against electric shock :** II

**Lampshade material:** PC

**Enclosure material:** PC

## 35006 STIVI LED 15W-NW-O

Ceiling-mounted LED light fitting



**Diode type:** LED SMD

**LED module:** DL-XXD-220-5B30C-A3

**Luminous flux of the light fitting [lm]:** 1800

**Colour temperature:** white

**Service life [h]:** 50000

**Luminous-flux-retention factor at the end of rated service life :**  
L70B50

**Number of on/off cycles:** ≥30000

**Lighting angle [°]:** 110

**Ambient temperature range to which the product can be exposed:** -20÷40

**Connection type:** Self-clamping block

**Range of sections of wires used [mm<sup>2</sup>]:** 0,5-2,5

**IK class:** 08

**IP class:** 65

**Kształt:** round

**Additional information:** It is not possible to replace the LED light source

**Additional information:** It is not possible to replace the control panel or control equipment

**Additional information:** Containing product (CP)

**Mercury content:** no

**Luminous efficiency of the lamp [lm/W]:** 120

### PARAMETERS FOR LED AND OLED LIGHT SOURCES:

**Energy consumption in on-mode of the light source**

**(kWh/1000h):** 14

**Energy efficiency class:** D

**Energy efficiency class of the light source in the contains product (CP):** D

**Useful luminous flux of the light source Φuse [lm]:** 2300

**Useful luminous flux of the light source Φuse [lm]:** in sphere (360°)

**Correlated colour temperature [K]:** 4000

**Colour consistency in McAdam ellipses :** 6

**On-mode power of the light source Pon [W]:** 13,7

**Height of the light source [mm]:** 206

**Width of the light source [mm]:** 206

**Depth of the light source [mm]:** 2

**Colour rendering index:** 80

**Chromaticity coordinates (x):** 0,38

**Chromaticity coordinates (y):** 0,38

## 35006 STIVI LED 15W-NW-O

Ceiling-mounted LED light fitting

**Claim of equivalent power [W]: 141**

**R9 colour rendering index value : 0**

**Survival factor: 0.9**

**The lumen maintenance factor: 0,96**

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 8

**Number of units in the secondary packaging :** 1

**Number of units in the packaging:** 8

**Net unit weight [g]:** 482

**Grammage [g]:** 642.5

**Gross unit weight [g]:** 578

**Length of a unit pack [cm]:** 22.5

**Width of a unit pack [cm]:** 6.5

**Height of a unit pack [cm]:** 23

**Weight of a cardboard box [kg]:** 5.14

**Width of a cardboard box [cm]:** 26


**Height of a cardboard box [cm]:** 25.5

**Length of a cardboard box [cm] :** 47

**Volume of a cardboard box [m<sup>3</sup>]:** 0.031161

### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

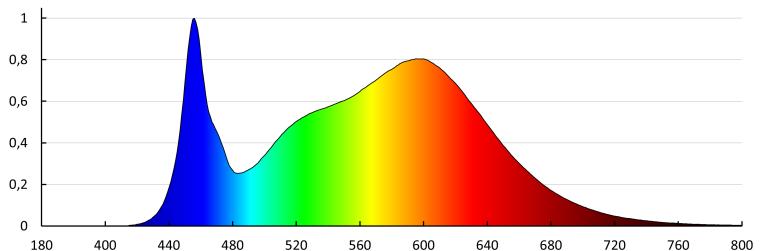


## 35006 STIVI LED 15W-NW-O

### Ceiling-mounted LED light fitting

KANLUX S.A. (kat 35006) STIVI LED 15W-NW-O / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 35006) STIVI LED 15W-NW-O  
Lampy: 1 x STIVI LED 15W-NW-O

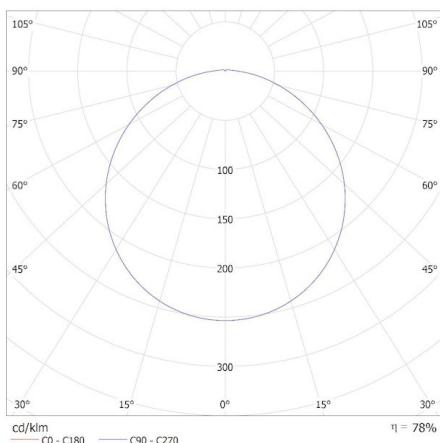

Date of issue: 27.02.2025, 13:36

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com