



35591 AL-MS-WW-MPR-W-NT

Linear LED luminaire

5905339355911



AL-MS-MPR-W-NT

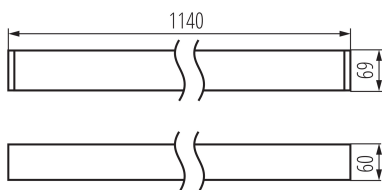

PRODUCT PARAMETERS:

Colour: white

Place of assembly: ceiling mounted

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Fixture lighting direction: down

Length [mm]: 1140

Width [mm]: 60

Height [mm]: 69

Integrated LED light source: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 18

Class of protection against electric shock: I

Lampshade material: plastic

Diode type: LED SMD

Luminous flux [lm]: 1980

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life:
L90B10

Number of on/off cycles: ≥ 30000

Lighting angle [°]: X75/Y90

Ambient temperature range to which the product can be exposed: $5 \div 25$

Shade type: microprismatic

Enclosure material: aluminum alloy

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1,5÷2,5

Lamp-heating time [s]: ≤ 1

Lamp-ignition time [s]: $\leq 0,5$

IP class: 20

Luminous efficiency of the lamp [lm/W]: 110

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Correlated colour temperature [K]: 3000

Colour consistency in McAdam ellipses: ≤ 3

Colour rendering index: 80


LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

35591 AL-MS-WW-MPR-W-NT

Linear LED luminaire

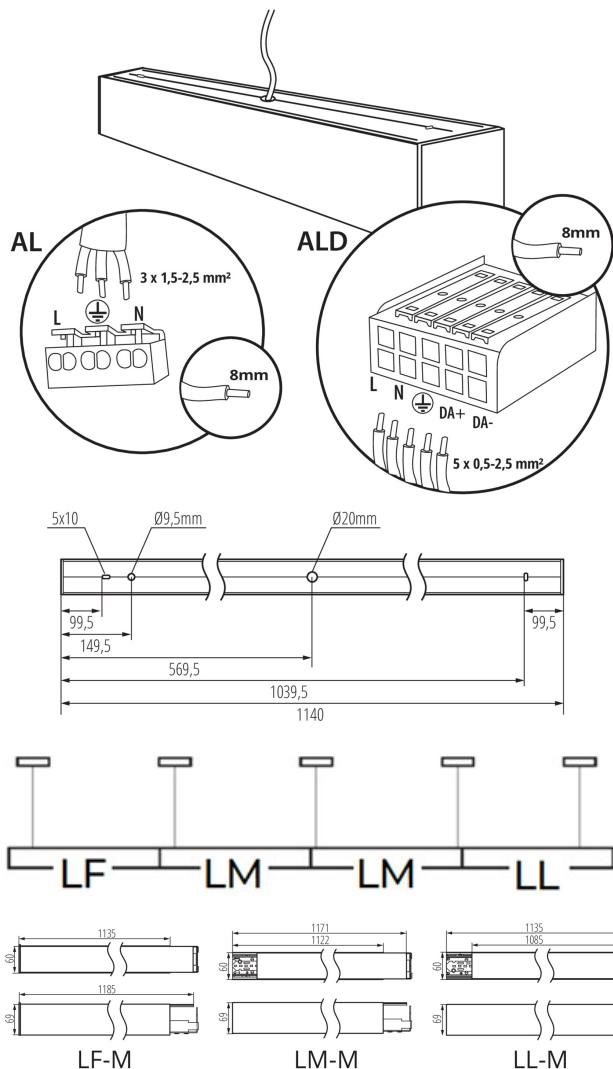

Number of units in the secondary packaging : 1

Number of units in the packaging : 1

Net unit weight [g] : 2042

Grammage [g] : 2370

Gross unit weight [g] : 2370

Length of a unit pack [cm] : 136

Width of a unit pack [cm] : 11

Height of a unit pack [cm] : 7

Weight of a cardboard box [kg] : 2.37

Width of a cardboard box [cm] : 11

Height of a cardboard box [cm] : 7

Length of a cardboard box [cm] : 136


Volume of a cardboard box [m³] : 0.010472

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 35591) AL-MS-WW-MPR-W-NT / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 35591) AL-MS-WW-MPR-W-NT
Lampy: 1 x AL-MS-WW-MPR

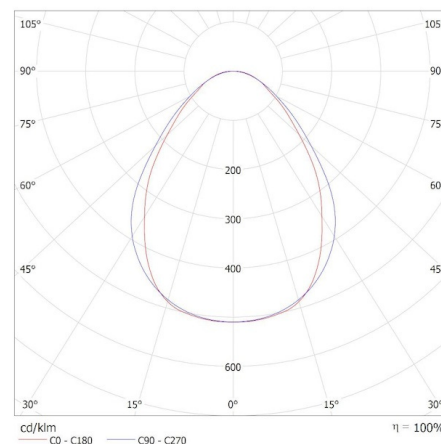

35591

AL-MS-WW-MPR-W-NT

Linear LED luminaire

ACCESSORIES		
32540	ALIN CORD 1F-W	Power supply terminal for ALIN luminaires and tracks, 1-phase, white, 150 cm
		
32541	ALIN CORD 1F-B	Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm
		
32542	ALIN CORD 1F-SR	Power supply terminal for ALIN luminaires and tracks, 1-phase, silver 150 cm
		
07871	ROPE-NT 150 SINGLE	ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set
		