



35594 AL-MS-NW-MPR-B-NT

Linear LED luminaire

5905339355942



PRODUCT PARAMETERS:





Colour: black
Place of assembly: ceiling mounted
Place of application: Indoors
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
Fixture lighting direction: down
Length [mm]: 1140
Width [mm]: 60
Height [mm]: 69
Integrated LED light source: yes
Version for connection in line [initial element] LF: 35447
Version for connection in line [central element] LM: 35471
Version for connection in line [final element] LL: 35495
Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 18
Class of protection against electric shock: I
Lampshade material: plastic
Diode type: LED SMD
Luminous flux [lm]: 2250
Colour temperature: white
Service life [h]: 50000
Luminous-flux-retention factor at the end of rated service life: L90B10
Number of on/off cycles: ≥30000
Lighting angle [°]: X75/Y90
Ambient temperature range to which the product can be exposed: 5÷25
Shade type: microprismatic
Enclosure material: aluminum alloy
Reflector material: PMMA
Connection type: Self-clamping block
Range of sections of wires used [mm²]: 1,5÷2,5
Lamp-heating time [s]: ≤1
Lamp-ignition time [s]: ≤0,5
IP class: 20
Luminous efficiency of the lamp [lm/W]: 125

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: ≤3
Colour rendering index: 80

35594 AL-MS-NW-MPR-B-NT

Linear LED luminaire

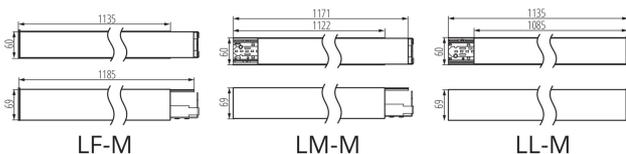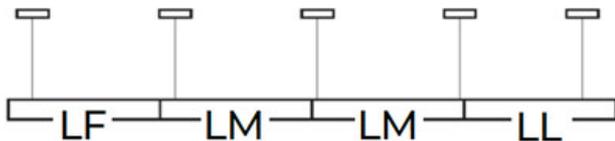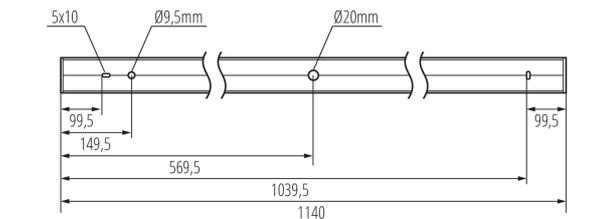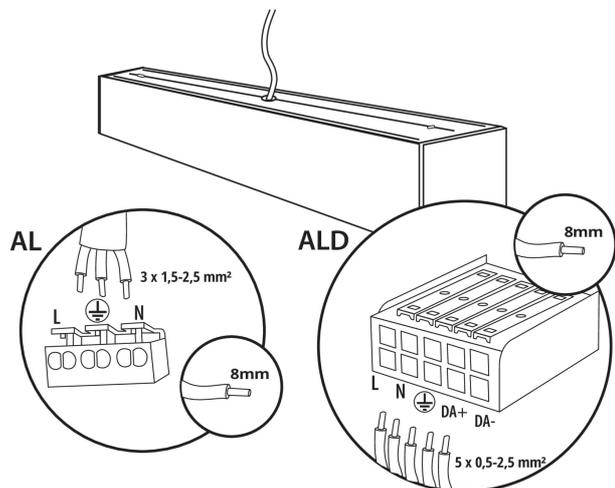

LOGISTIC DATA:


Unit of measurement: unit
Packaging method: 1
Number of units in the secondary packaging: 1
Number of units in the packaging: 1
Net unit weight [g]: 2042
Grammage [g]: 2370
Gross unit weight [g]: 2370
Length of a unit pack [cm]: 136
Width of a unit pack [cm]: 11
Height of a unit pack [cm]: 7
Weight of a cardboard box [kg]: 2.37
Width of a cardboard box [cm]: 11
Height of a cardboard box [cm]: 7
Length of a cardboard box [cm]: 136
Volume of a cardboard box [m³]: 0.010472

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 35594) AL-MS-NW-MPR-B-NT / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 35594) AL-MS-NW-MPR-B-NT
Lampy: 1 x AL-MS-NW-MPR

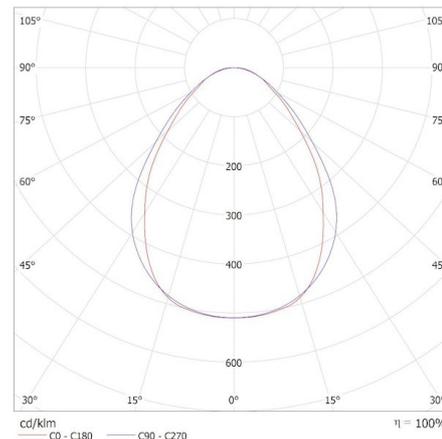

35594 AL-MS-NW-MPR-B-NT

Linear LED luminaire

ACCESSORIES

32540

ALIN CORD 1F-W

Power supply terminal for ALIN luminaires and tracks, 1-phase, white, 150 cm



32541

ALIN CORD 1F-B

Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm



32542

ALIN CORD 1F-SR

Power supply terminal for ALIN luminaires and tracks, 1-phase, silver 150 cm



07871

ROPE-NT 150 SINGLE

ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set

