


35597 AL-MS-WW-MAT-S-NT

Linear LED luminaire

5905339355973




AL-MS-MAT-S-NT

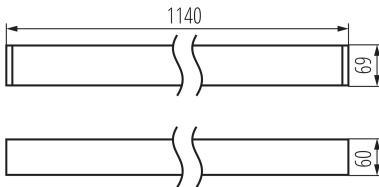**PRODUCT PARAMETERS:****Colour:** silver**Place of assembly:** ceiling mounted**Place of application:** Indoors**Minimum distance from the illuminated object:** 0,5m**Compatible with a dimmer:** no**Fixture lighting direction:** down**Length [mm]:** 1140**Width [mm]:** 60**Height [mm]:** 69**Integrated LED light source:** yes**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50**Maximum power [W]:** 18**Class of protection against electric shock:** I**Lampshade material:** plastic**Diode type:** LED SMD**Luminous flux [lm]:** 2140**Service life [h]:** 50000**Luminous-flux-retention factor at the end of rated service life:** L90B10**Number of on/off cycles:** ≥30000**Lighting angle [°]:** X85/Y95**Ambient temperature range to which the product can be exposed:** 5÷25**Shade type:** matt**Enclosure material:** aluminum alloy**Connection type:** Self-clamping block**Range of sections of wires used [mm²]:** 1,5÷2,5**Lamp-heating time [s]:** ≤1**Lamp-ignition time [s]:** ≤0,5**IP class:** 20**Luminous efficiency of the lamp [lm/W]:** 119**PARAMETERS FOR LED AND OLED LIGHT SOURCES:****Correlated colour temperature [K]:** 3000**Colour consistency in McAdam ellipses:** ≤3**Colour rendering index:** 80**LOGISTIC DATA:****Unit of measurement:** unit**Packaging method:** 1

35597 AL-MS-WW-MAT-S-NT

Linear LED luminaire

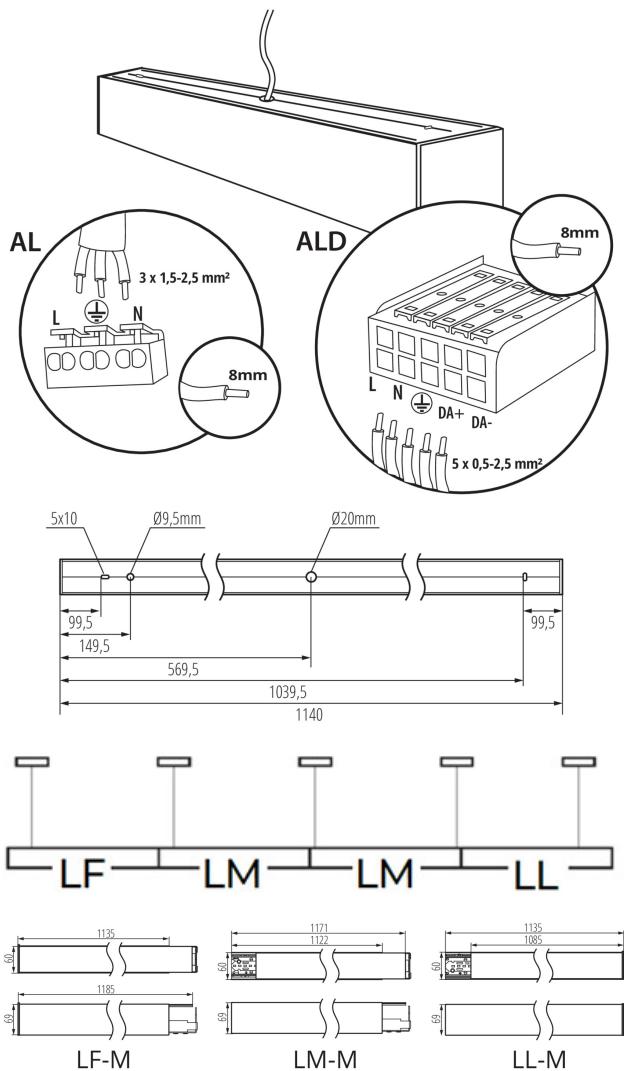

Number of units in the secondary packaging : 1

Number of units in the packaging : 1

Net unit weight [g] : 2042

Grammage [g] : 2370

Gross unit weight [g] : 2370

Length of a unit pack [cm] : 136

Width of a unit pack [cm] : 11

Height of a unit pack [cm] : 7

Weight of a cardboard box [kg] : 2.37

Width of a cardboard box [cm] : 11

Height of a cardboard box [cm] : 7

Length of a cardboard box [cm] : 136


Volume of a cardboard box [m³] : 0.010472

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 35597) AL-MS-WW-MAT-S-NT / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 35597) AL-MS-WW-MAT-S-NT
Lampy: 1 x AL-MS-WW-MAT

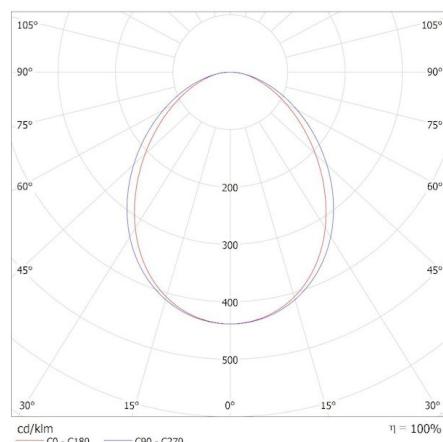

35597 AL-MS-WW-MAT-S-NT

Linear LED luminaire

ACCESSORIES

| | | |
|---|--------------------|---|
| 32540 | ALIN CORD 1F-W | Power supply terminal for ALIN luminaires and tracks, 1-phase, white, 150 cm |
|  | | |
| 32541 | ALIN CORD 1F-B | Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm |
|  | | |
| 32542 | ALIN CORD 1F-SR | Power supply terminal for ALIN luminaires and tracks, 1-phase, silver 150 cm |
|  | | |
| 07871 | ROPE-NT 150 SINGLE | ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set |
|  | | |