


**35599 AL-MS-WW-MPR-S-NT**

Linear LED luminaire

5905339355997




AL-MS-MPR-S-NT

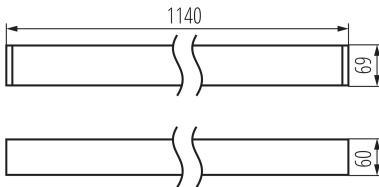**PRODUCT PARAMETERS:****Colour:** silver**Place of assembly:** ceiling mounted**Place of application:** Indoors**Minimum distance from the illuminated object:** 0,5m**Compatible with a dimmer:** no**Fixture lighting direction:** down**Length [mm]:** 1140**Width [mm]:** 60**Height [mm]:** 69**Integrated LED light source:** yes**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50**Maximum power [W]:** 18**Class of protection against electric shock:** I**Lampshade material:** plastic**Diode type:** LED SMD**Luminous flux [lm]:** 1980**Service life [h]:** 50000**Luminous-flux-retention factor at the end of rated service life:** L90B10**Number of on/off cycles:** ≥30000**Lighting angle [°]:** X75/Y90**Ambient temperature range to which the product can be exposed:** 5÷25**Shade type:** microprismatic**Enclosure material:** aluminum alloy**Connection type:** Self-clamping block**Range of sections of wires used [mm<sup>2</sup>]:** 1,5÷2,5**Lamp-heating time [s]:** ≤1**Lamp-ignition time [s]:** ≤0,5**IP class:** 20**Luminous efficiency of the lamp [lm/W]:** 110**PARAMETERS FOR LED AND OLED LIGHT SOURCES:****Correlated colour temperature [K]:** 3000**Colour consistency in McAdam ellipses:** ≤3**Colour rendering index:** 80**LOGISTIC DATA:****Unit of measurement:** unit**Packaging method:** 1

## 35599 AL-MS-WW-MPR-S-NT

Linear LED luminaire

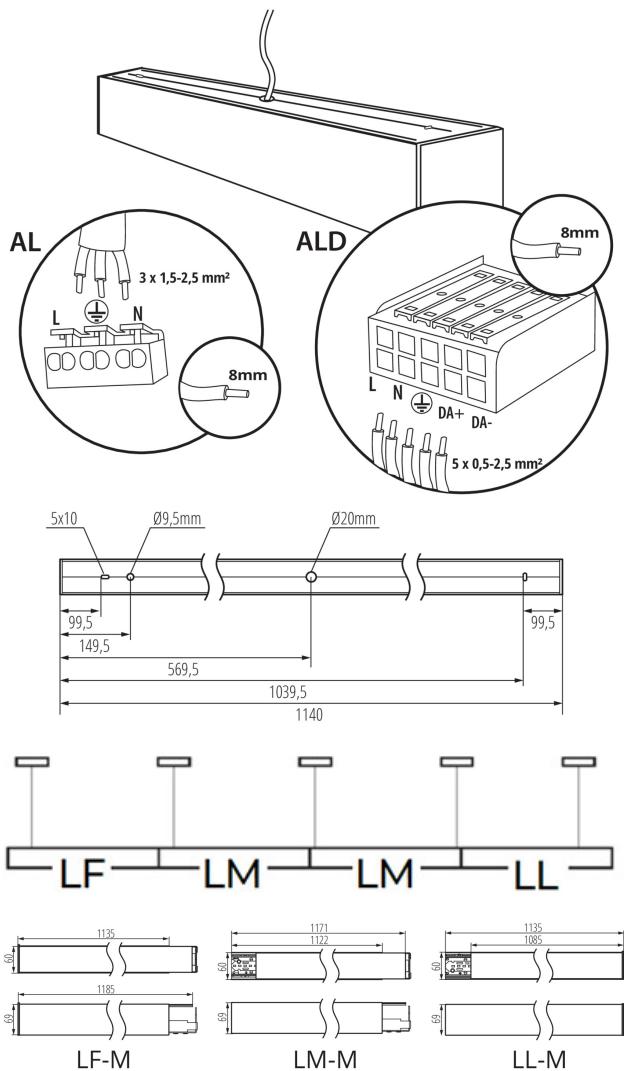

**Number of units in the secondary packaging : 1**

**Number of units in the packaging : 1**

**Net unit weight [g] : 2042**

**Grammage [g] : 2370**

**Gross unit weight [g] : 2370**

**Length of a unit pack [cm] : 136**

**Width of a unit pack [cm] : 11**

**Height of a unit pack [cm] : 7**

**Weight of a cardboard box [kg] : 2.37**

**Width of a cardboard box [cm] : 11**

**Height of a cardboard box [cm] : 7**

**Length of a cardboard box [cm] : 136**


**Volume of a cardboard box [m³] : 0.010472**

### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 35599) AL-MS-WW-MPR-S-NT / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 35599) AL-MS-WW-MPR-S-NT  
Lampy: 1 x AL-MS-WW-MPR

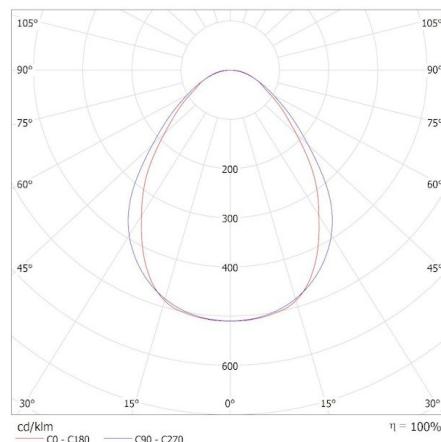

**35599 AL-MS-WW-MPR-S-NT**

Linear LED luminaire

**ACCESSORIES**

<b>32540</b>	ALIN CORD 1F-W	Power supply terminal for ALIN luminaires and tracks, 1-phase, white, 150 cm
		
<b>32541</b>	ALIN CORD 1F-B	Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm
		
<b>32542</b>	ALIN CORD 1F-SR	Power supply terminal for ALIN luminaires and tracks, 1-phase, silver 150 cm
		
<b>07871</b>	ROPE-NT 150 SINGLE	ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set
		